

SASSO PRO 80 adjustable

flush trimless

048-2310E38M 052-1921327



Project / Type	
Notes	
Count / Date	



--	--	--	--

General
Ceiling , Recessed
tilt max 35°
rotation 360°
black , RAL9005 ¹
Mounting set traffic white
IP20
360 lm

LED
colour warm dimming
1800 K - 2700 K
CRI ≥ 95
L80 / 50000 h
initial MacAdam ≤ 4 SDCM

Optical
medium
beam angle 26°
UGR < 19 , ≥65° <1500 cd/m ²
PstLM ≤ 1.0 ²
SVM ≤ 0.4 ²


Electrical
DALI-2
system 6.5 W
PC2 220-240V
system 55 lm/W ³
inset 74 lm/W ⁴

Physical
trimless
length 87 mm
width 92 mm
height 83 mm
0.46 kg


Cutout
diameter 95 mm
min. ceiling thickness 12.5 mm
max. ceiling thickness 25 mm
recessed depth 110 mm

¹ RAL code ² Value of containing product at full load (undimmed)
³ incl. optical losses and the efficiency of the operating device (converter)
⁴ incl. optical losses

Light distribution



Product drawing

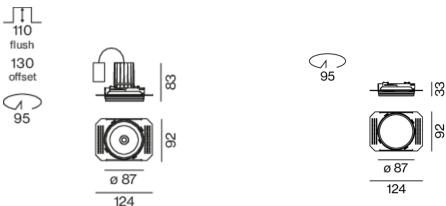

Installation instructions



Lighting calculator

