

SASSO PRO 80 adjustable

flush trimless

048-2310518V 052-1921327



Project / Type _____

Notes _____

Count / Date _____



General

Ceiling , Recessed _____

tilt max 35° _____

rotation 360° _____

black , RAL9005 ¹ _____

Mounting set traffic white _____

IP20 _____

379 lm _____

LED

3000 K _____

CRI ≥ 90 _____

L90 / 50000 h _____

initial MacAdam ≤ 2 SDCM _____

R_g: 98 , R_r: 91 , R₍₁₋₁₅₎: 89 _____

MR 0.6 _____

MDER 0.55 _____

Optical

super spot _____

beam angle 8° _____

UGR < 10 _____

Electrical

non DIM _____

system 7.7 W _____

PC2 220-240V _____

system 49 lm/W² _____

inset 66 lm/W³ _____

Physical

trimless _____

length 87 mm _____

width 92 mm _____

height 83 mm _____

0.46 kg _____

Cutout

diameter 95 mm _____

min. ceiling thickness 12.5 mm _____

max. ceiling thickness 25 mm _____

recessed depth 110 mm _____

¹ RAL code


² incl. optical losses and the efficiency of the operating device (converter)

³ incl. optical losses

Light distribution



Product drawing

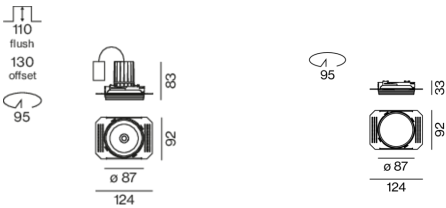

Installation instructions



Lighting calculator

