

SASSO PRO 80 adjustable flush trim square

048-2310618F 052-1942318



Project / Type	
Notes	
Count / Date	



General

Ceiling , Recessed	
tilt max 35°	
rotation 360°	
black , RAL 9005 ¹	
Mounting set jet black	
IP20	
735 lm	

LED

4000 K	
CRI ≥ 90	
L90 / 50000 h	
initial MacAdam ≤ 3 SDCM	
R _g : 97 , R _r : 89 , R ₍₁₋₁₅₎ : 91	
MR 0.85	
MDER 0.77	

Optical

flood	
beam angle 37°	
UGR < 19 , ≥65° <3000 cd/m ²	
PstLM ≤ 1.0 ²	
SVM ≤ 0.4 ²	

Electrical

non DIM	
220-240 V	
system 8.3 W	
system 89 lm/W ³	
PC2	


Physical

trim	
length 98 mm	
width 98 mm	
height 83 mm	
0.43 kg	


Cutout

diameter 92 mm	
min. ceiling thickness 2 mm	
max. ceiling thickness 25 mm	
recessed depth 110 mm	

Light distribution



Product drawing

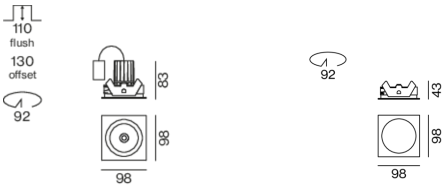

Installation instructions



Lighting calculator

