

MINO 60 high lumen


surface
046-41M563GH



Project / Type

Notes

Count / Date

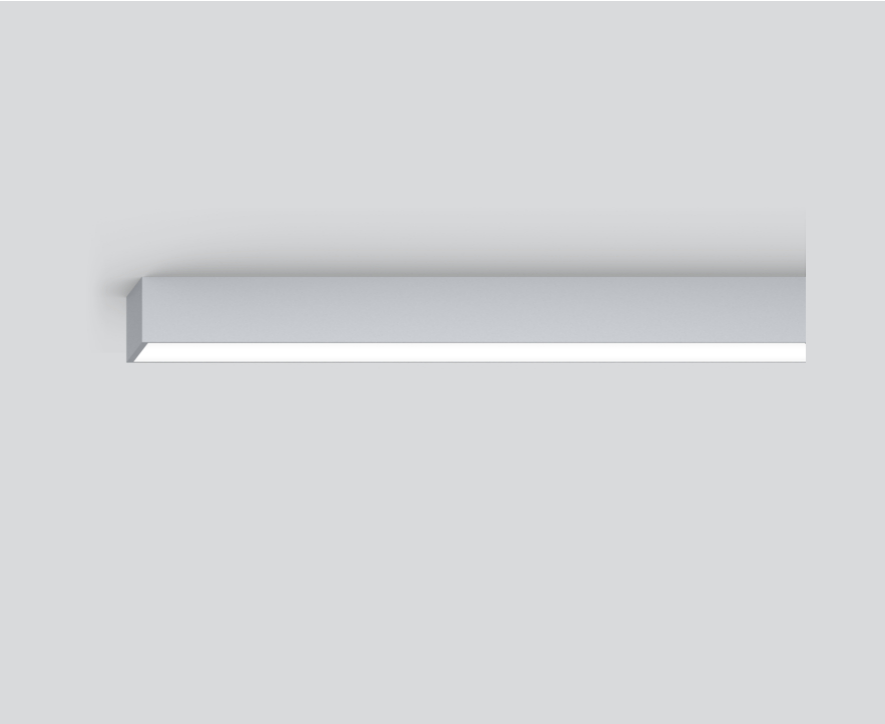

General

Ceiling , Surface

grey , RAL9006 ¹

IP20

3930 lm

2670 lm/m

LED

4000 K

CRI ≥ 80

L90 / 50000 h

initial MacAdam ≤ 3 SDCM

MR 0.72

MDER 0.65

Optical

High Performance Opal

opal (lambertsch)

PstLM ≤ 1.0 ²

SVM ≤ 0.4 ²

Electrical

DALI-2

220-240 V

system 29.1 W

PC1

system 135 lm/W³

1 DALI Addr.

20 W/m

Physical

length 1480 mm


width 60 mm

height 80 mm

3.8 kg

¹ RAL code ² Value of containing product at full load (undimmed)
³ incl. optical losses and the efficiency of the operating device (converter)

Light distribution



Product drawing



Installation instructions



Lighting calculator

