

# BASO 40opal

surface


045-1126517H



Project / Type

Notes

Count / Date

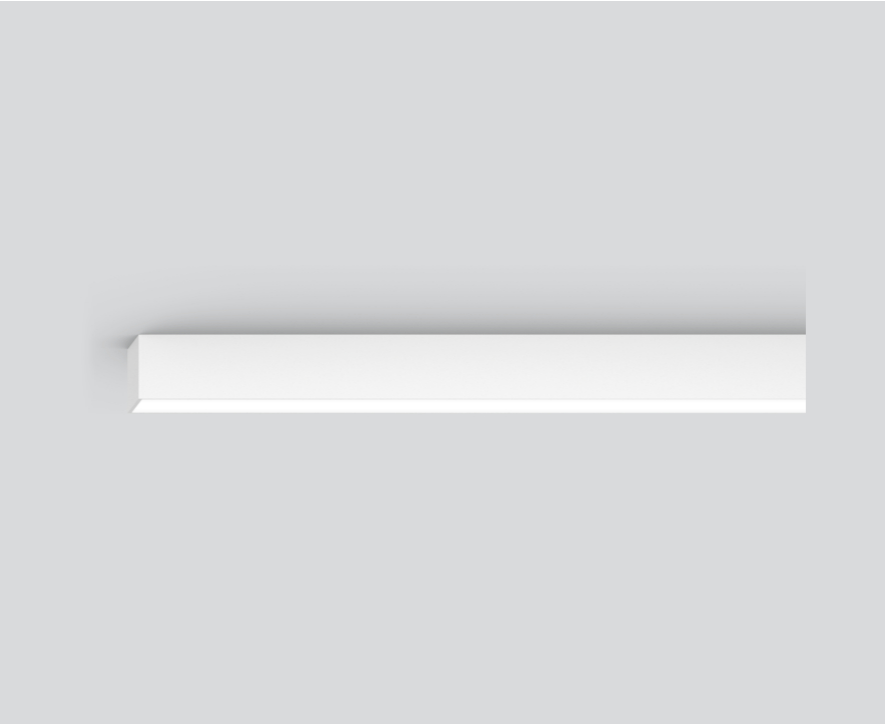

CRI

≥ 80

General

Ceiling , Surface

white , RAL9010 <sup>1</sup>

2210 lm/m

IP20

3980 lm

LED

3000 K

CRI ≥ 80

L90 / 50000 h

photobio. safety RG 0 - no Risk

initial MacAdam ≤ 3 SDCM

MR 0.54

MDER 0.49

Optical

High Performance Opal

opal (lambertsch)

PstLM ≤ 1.0 <sup>2</sup>

SVM ≤ 0.4 <sup>2</sup>

Electrical

non DIM

41 W

PC1 220-240V

97 lm/W

23 W/m

Physical

length 1809 mm


width 42 mm

height 76 mm


2.9 kg

<sup>1</sup> RAL code <sup>2</sup> Value of containing product at full load (undimmed)

Light distribution



Product drawing



Installation instructions



Lighting calculator

