

BASO 40opal

surface


045-1124638H



Project / Type

Notes

Count / Date

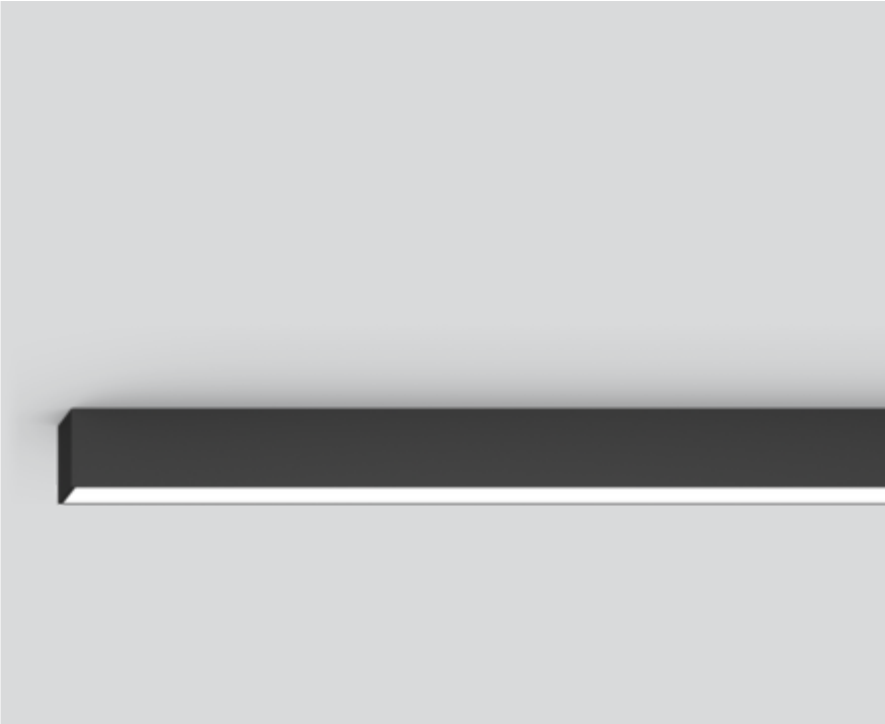

General

Ceiling , Surface
black , RAL9005 ¹
2340 lm/m
IP20
2810 lm

LED

4000 K
CRI ≥ 80
L90 / 50000 h
photobio. safety RG 0 - no Risk
initial MacAdam ≤ 3 SDCM
MR 0.72
MDER 0.66

Optical

High Performance Opal
opal (lambertsch)
PstLM ≤ 1.0 ²
SVM ≤ 0.4 ²

Electrical


DALI-2
system 27.5 W
PC1 220-240V
system 102 lm/W³
1 DALI Addr.
23 W/m

Physical


length 1209 mm
width 42 mm
height 76 mm
2 kg

¹ RAL code ² Value of containing product at full load (undimmed)
³ incl. optical losses and the efficiency of the operating device (converter)

Light distribution



Product drawing



Installation instructions



Lighting calculator

