

BASO 40 microprismatic

trim


045-0526517Z



Project / Type

Notes

Count / Date

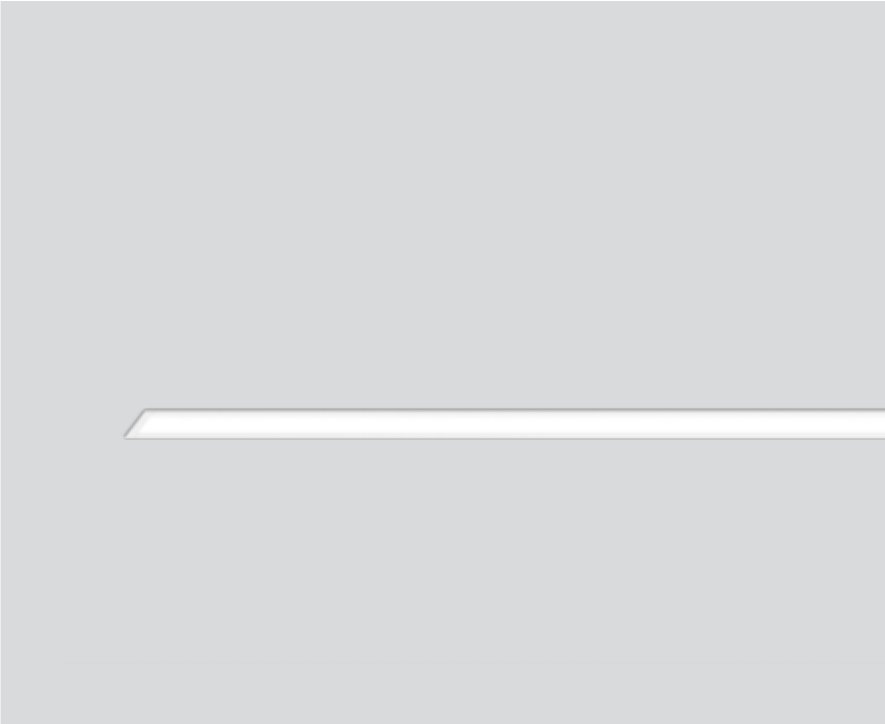

General

Ceiling , Recessed
white , RAL 9016 ¹
IP20
3550 lm
1970 lm/m

LED

3000 K
CRI ≥ 80
L90 / 50000 h
initial MacAdam ≤ 3 SDCM
MR 0.54
MDER 0.49

Optical

Microprismatic
microprismatic
PstLM ≤ 1.0 ²
SVM ≤ 0.4 ²

Electrical

non DIM
220-240 V
system 41 W
system 87 lm/W³
PC1
23 W/m


Physical

trim
length 1819 mm
width 57 mm
height 75 mm
3.1 kg

Cutout

length 1809 mm
width 48 mm
min. ceiling thickness 8 mm
max. ceiling thickness 20 mm
recessed depth 100 mm

Light distribution



Product drawing

