

BASO 40 reflector

surface


045-112261GR



Project / Type _____

Notes _____

Count / Date _____

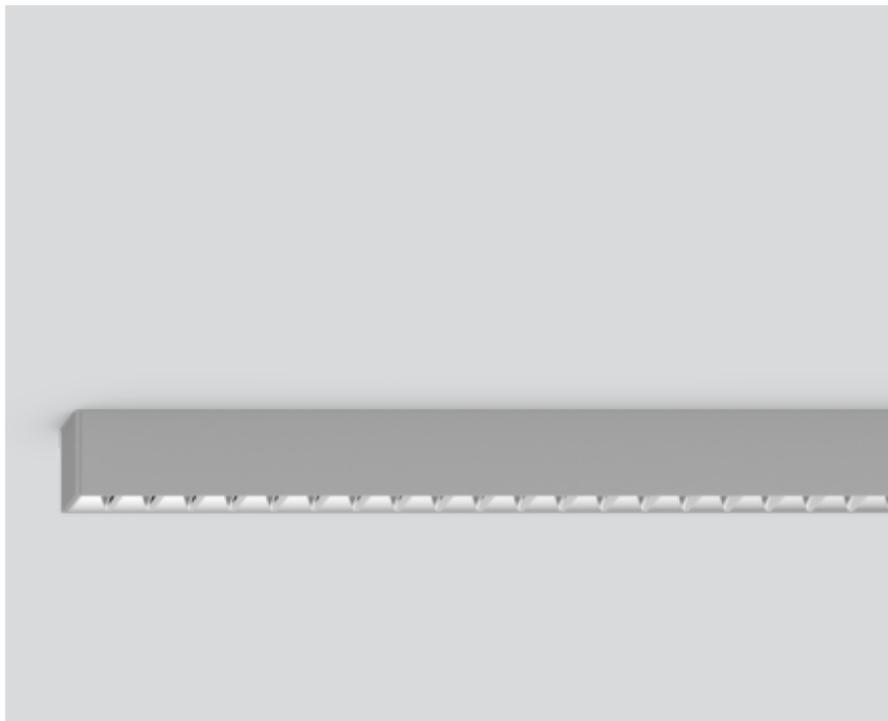

General

Ceiling , Surface _____

grey , RAL 9006 ¹ _____

IP20 _____

2180 lm _____

3660 lm/m _____

LED

4000 K _____

CRI \geq 80 _____

L90 / 50000 h _____

initial MacAdam \leq 3 SDCM _____

MR 0.72 _____

MDER 0.66 _____

Optical

Reflector _____

symmetric _____

UGR \leq 19 , \geq 65° <1500 cd/m² _____

PstLM \leq 1.0 ² _____

SVM \leq 0.4 ² _____

Electrical

non DIM _____

220-240 V _____

system 20.2 W _____

system 108 lm/W³ _____

PC1 _____

34 W/m _____

Physical

length 609 mm _____


width 42 mm _____

height 76 mm _____


1.2 kg _____

Luminaire housing made of extruded aluminium profile; light tight final end caps made of aluminium; no visible screws; angular design; surface grey powder coated; suitable for wall or ceiling mounting; luminaire profile with pre-assembled converter unit can be pre-mounted on site; remaining lamp components mounted without tools; light inset made from extruded profile for improved thermal management; light colour 4000 K; binning initial MacAdam \leq 3 SDCM; CRI \geq 80; min. 90% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; high quality, chromed reflector with faceted design; UGR \leq 19; VDU compatible workplace luminaire according to DIN EN 12464-1; luminance above 65° \leq 1500 cd/m²; degree of protection IP20; PC1; 220-240 V; internal wiring in light halogen free; incl. converter, non dimmable; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Light distribution



Product drawing



¹ RAL code ² Value of containing product at full load (undimmed)
³ incl. consideration of optical losses, internal control unit losses & operating device efficiency

Installation instructions



Lighting calculator



BASO 40 reflector

surface

045-112261GR



Project / Type

Notes

Count / Date

Maintenance Factors

Operating Time [h]	10 000	20 000	30 000	40 000	50 000
LLMF	0.98	0.95	0.93	0.91	0.9
LSF	1	1	1	1	1

MF	LMF × RSMF × LLMF × LSF	RSMF ^a	Room Surface Maintenance Factor
MF	Maintenance Factor	LLMF	Lamp Lumens Maintenance Factor
LMF ^a	Luminaire Maintenance Factor	LSF	Lamp Survival Faktor

^a According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.

Circuit Breaker Types

Automatic Circuit Breaker Type	Number of Fixtures
B10	9
B13	13
B16	15
B20	18
C10	18
C13	26
C16	30
C20	36