


MINO 60 CIRCLE 1500

direct

ceiling
034-211053XZ




Project / Type
Notes
Count / Date

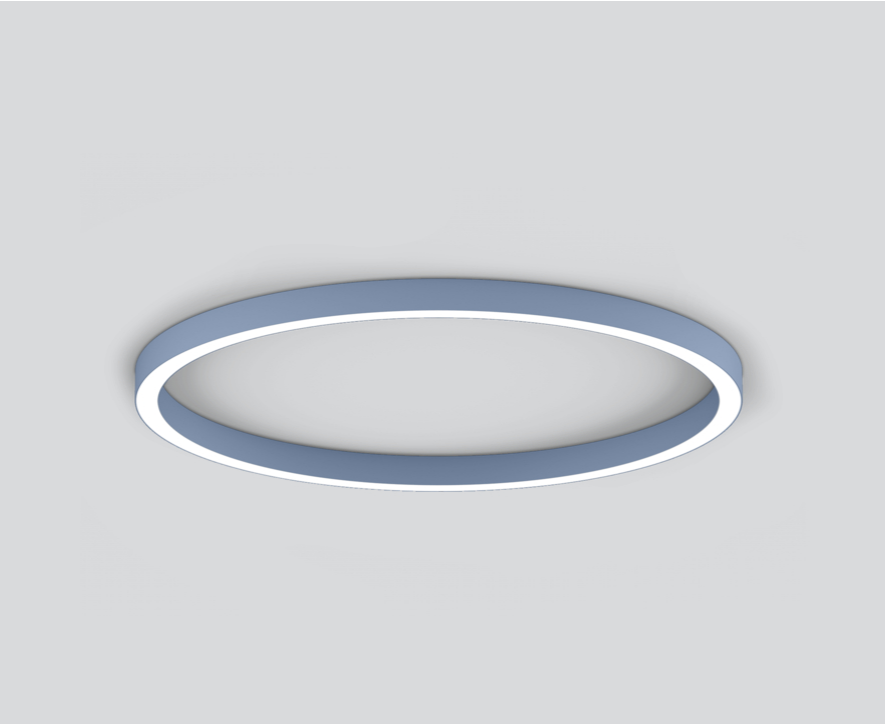


Ring-shaped light fitting in rolled and seamlessly welded extruded aluminium profile; suitable for ceiling mounting; surface special colours powder coated; LED light inset consisting of highly reflective lacquered aluminium for improved thermal management; light colour 3000 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 80 ; min. 90% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; micro prismatic PMMA diffuser incl. diffuser film for homogeneous illumination and reduced luminance; degree of protection IP20; PC1; 220-240 V; internal wiring in light halogen free; incl. DALI-2 converter; sound absorbing accessories available; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Light distribution



Product drawing



General

Ceiling , Surface
special colours
IP20
9130 lm

LED

3000 K
CRI ≥ 80
L90 / 50000 h
initial MacAdam ≤ 3 SDCM
MR 0.56
MDER 0.51

Optical

Microprismatic
microprismatic
PstLM $\leq 1.0^{1\ 2}$
SVM $\leq 0.4^{1\ 2}$

Electrical

DALI-2
220-240 V
system 83 W
system 110 lm/W ³
PC1
4 DALI Addr.

Physical

diameter 1560 mm
height 80 mm
centerline radius 750 mm
12 kg

¹ combined ² Value of containing product at full load (undimmed)
³ FIXTURE: incl. consideration of optical losses & internal control unit losses SYSTEM: incl. consideration of optical losses, internal control unit losses & operating device efficiency.

Installation instructions



Lighting calculator

