

MINO CIRCLE ACOUSTIC

1000

suspended


034-272111L



Project / Type

Notes

Count / Date

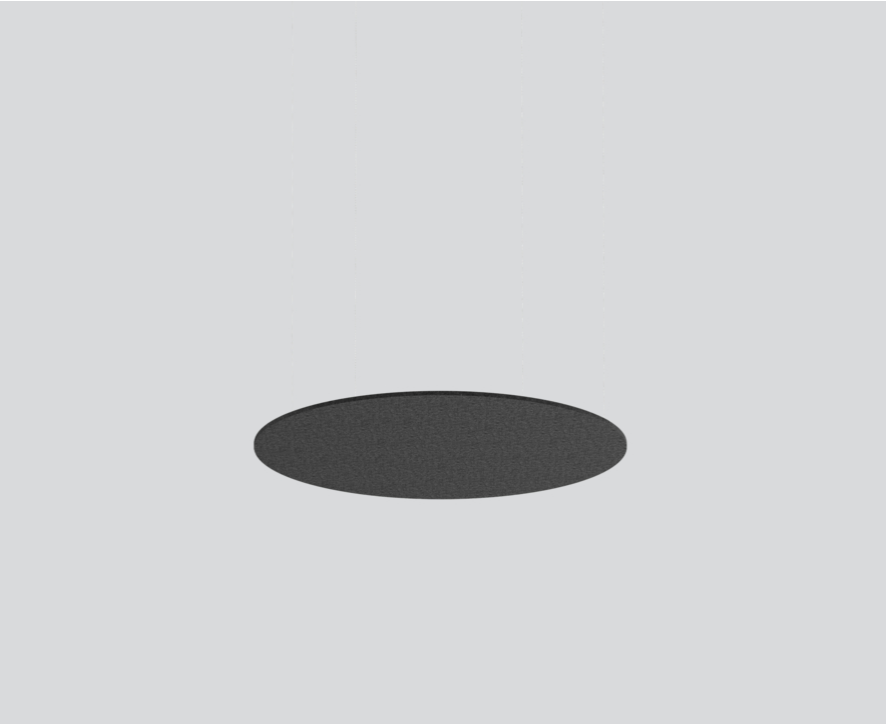

General

Ceiling , Suspended

black

Physical

diameter 937 mm

height 24 mm

2.1 kg

Acoustics

Alpha w (α_w) up to 0.65 ¹

SAC (sound absorption class) up to C ¹

NRC up to 0.7 ¹

SAA up to 0.74 ¹


¹ Acoustic data calculations based on MINO CIRCLE ACOUSTIC 1000, cavity 100cm

Installation instructions



Acoustic element made of high quality, self-supporting PET felt with sound absorbing properties, consisting of at least 50 % post-consumer recycled PET; round design; high quality visual and tactile surface, black; colour may deviate; absorption of direct sound and sound reflected from the ceiling; this creates high acoustic performance; pendant fitting with 1500mm cable suspension; toolless suspension height adjustment of the acoustic element;

Product drawing



[‘034-272111L’] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of XAL GmbH apply.
© XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · www.xal.com



Equivalent sound absorption area (A_{eq})

| 125 HZ | 250 HZ | 500 HZ | 1000 HZ | 2000 HZ | 4000 HZ |
|--------|--------|--------|---------|---------|---------|
| 0.5 | 0.5 | 0.87 | 1.3 | 1.43 | 1.57 |

Sound absorption coefficient (α_p)

