

RECOVER DALI1650

099-2211D37



Project / Type
Notes
Count / Date



--	--	--

General

Wall , Surface
white , RAL 9010 ¹
IP40
direct 559 ² , 1480 ³ , 2 ⁴ lm
total 559 ² , 1480 ³ , 8380 ⁴ lm
559 ² , 1480 ³ , 8380 ⁴ lm
indirect 8380 lm

LED

tunable white ² -3000 K ³
CRI ≥ 70 ² -97 ³
L95 / 50000 h ² -L80 / 50000 h ³
initial MacAdam ≤ 3 SDCM
R _g : 92 , R _r : 86 , R ₍₁₋₁₅₎ : 94
MR 0.92 ² -0.53 ³
MDER 0.83 ² -0.48 ³
2700 K - 6500 K

Optical

PstLM ≤ 1.0 ³ 4 5
SVM ≤ 0.4 ³ 4 5

Electrical


DALI-2 ² -non DIM ³
220-240 V
system 9.4 ² , 23.5 ³ , 75 ⁴ W
system 59 ² , 63 ³ , 112 ⁴ lm/W ⁶
PC1

Physical


length 1645 mm
width 223 mm
height 80 mm
12 kg

LED wall mounted light for standard nursing area; IP 40 protection; 1 pc per bed; mounting height of upper edge of luminaire: 180cm; rectangular luminaire profile with direct / indirect light distribution, surface white powder coated; end cap in same colour; direct and indirect light exit with clear toughened glass cover; cable inlet on the wall side for 220-240V power supply, for the examination light circuit and the reading light and 2 DALI control lines; power feed from the rear (wall mounting profile preassembled); Luminaire offers 3 kinds of lighting; 1) Reading light 3000K; flush mounted, equipped with lens technology to avoid glare to neighbouring bed; reading light switchable by means of a connection to a potential-free contact (e.g., via a patient terminal provided by the customer); 2) Examination light 3000K; switchable by means of a connection to a button; 3) Indirect, tuneable white room lighting; 2700K – 6500K; controllable via DALI Control; maximum power consumption 106W at 6500K; luminous flux 8380lm at 6500K; L80 min. 80% of luminous flux after 50000 operating hours; reading and examination light: colour temperature 3000K; colour rendering CRI > 90, CRI typically 95; colour point binning: directly on the BBL, colour homogeneity: initial <3-Step SDCM scale, colour point stability: final after 10000 hrs <4-Step SDCM scale; PC I; complies with the following provisions: EN (IEC) 60598-1 and the supplement EN (IEC) 60598-2-25; dimensions of housing W 1650mm, visible H 47mm, wall profile H 80mm, D 223mm; Manufacturer XAL, type RECOVER dali 1650; necessary accessories per room: DALI POWER SUPPLY and DALI control

Light distribution

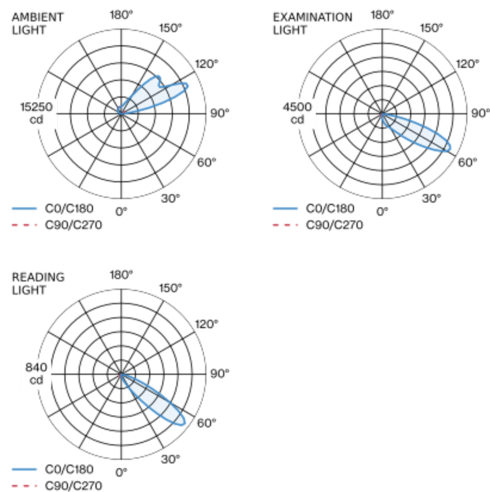

Product drawing



¹ RAL code ² READING LIGHT ³ EXAMINATION LIGHT
⁴ AMBIENT LIGHT
⁵ Value of containing product at full load (undimmed)
⁶ FIXTURE: incl. consideration of optical losses & internal control unit losses SYSTEM: incl. consideration of optical losses, internal control unit losses & operating device efficiency.

Installation instructions

