

**Quickinfo**

3000 K  
 CRI ≥ 80  
 L95 @ 50 000 h  
 up to 2500 lm  
 non DIM  
 IK 07, IP 65


**Type**



**Colour**



**Light distributions**



**Description**

**EN** Floor or wall mounted light in aluminium with simple, minimalist design; luminaire head with integrated cooling fins; ±90° tilttable, lockable every 30°; anodised surface and dark grey powder coated; optional mounting screwed on or with ground spike (available as an accessory); partially printed safety glass, fixed with stainless steel screws; incl. high quality lens system symmetrical or asymmetrical light distribution; energy-efficient LEDs with very good colour rendering; binning initial ≤3 MacAdam; available in the light colour 3000 K; CRI ≥ 80; min. 95% of the luminous flux after 50 000 hours; degree of protection IP65, with pressure compensation valve; PC I; shock resistance IK 07; ambient temperatures from -20°C to +50°C; separate luminaire wiring compartment, suitable for through wiring

**DE** Boden- bzw. Wandanbauleuchte aus Aluminium in schlichtem, reduziertem Design; Leuchtenkopf mit integrierten Kühlrippen; ±90° schwenkbar und alle 30° fixierbar; Oberfläche schutzeloxiert und dunkelgrau pulverbeschichtet; Montage wahlweise aufgeschraubt oder mit Erdspeiß (als Zubehör erhältlich); teilbedrucktes Sicherheitsglas, fixiert mit Edelstahlschrauben; inkl. hochwertiger Linsenoptik symmetrischer oder asymmetrischer Lichtverteilung; energieeffiziente LEDs mit sehr guter Farbwiedergabe; Binning initial ≤3 MacAdam; lieferbar in der Lichtfarbe 3000 K; CRI ≥ 80; min. 95% des Lichtstromes nach 50 000 h Lebensdauer; Schutzart IP65, mit Druckausgleichsventil; SK I; Schlagfestigkeit IK 07; Umgebungstemperaturen von -20°C bis +50°C; separater Leuchtenanschlussraum, geeignet für Durchgangsverkabelung

**STREAMCUT**

surface

### Order options

**IP RATING**

IP65

**COLOUR TEMPERATURE**

3000K

**CONTROL**

non DIM

**MATERIAL COLOUR**

dark grey

**LIGHT OPTIC COVER**

asymmetric  A  
 symmetric flood 50°  F

### Options on request

**COLOR RENDERING INDEX**

CRI ≥ 90 (35W)



### STREAMCUT surface



35W version available from Q3/2021

**IP65 ASYMMETRIC/FLOOD**

SYSTEM POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
14W	3000K	1230lm	088-282151D <input checked="" type="checkbox"/>
35W	3000K	2500lm	088-285151DA

luminous flux flood 50°


### Accessory

**EARTH SPIKE**

TYPE	ORDER CODE
earth spike	088-2892110




### Illumination example

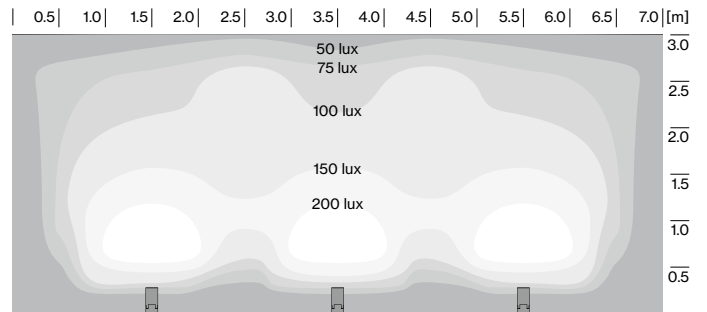

**STREAMCUT surface (14W) with symmetric flood optics (3 luminaires)**

Zonal lighting: distance to wall: 1.5m/distance between luminaires: 2.0m, 30° tilt

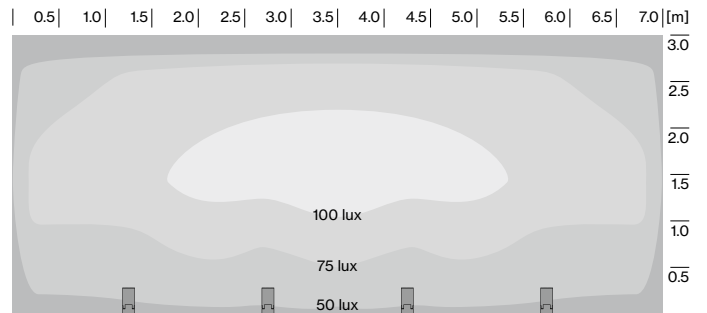

**STREAMCUT surface (14W) with asymmetric optics (4 luminaires)**

Areal lighting: distance to wall: 1.5m/distance between luminaires: 1.5m, 30° tilt