

# SASSO 100 square wallwasher/floor

trim

048-2750617W 048-2797318 002-90776



Project / Type

Notes

Count / Date



### General

Ceiling , Recessed

white , RAL9016 <sup>1</sup>

Mounting set jet black

IP20

2780 lm

### LED

4000 K

CRI ≥ 90

L80 / 50000 h

initial MacAdam ≤ 2 SDCM

R<sub>g</sub>: 97 , R<sub>f</sub>: 90 , R<sub>t(1-15)</sub>: 89

MR 0.81

MDER 0.74

### Optical

wallwasher floor

PstLM ≤ 1.0 <sup>2</sup>

SVM ≤ 0.4 <sup>2</sup>

### Electrical

DALI-2

system 27.5 W

inset 23.4 W

36 Vf

700 mA

PC2 220-240V

system 101 lm/W<sup>3</sup>

inset 119 lm/W<sup>4</sup>

### Physical

trim

length 118 mm

width 118 mm

height 96 mm

0.73 kg

### Cutout

length 112 mm


width 112 mm

min. ceiling thickness 2 mm


max. ceiling thickness 25 mm

recessed depth 100 mm

### Light distribution



### Product drawing

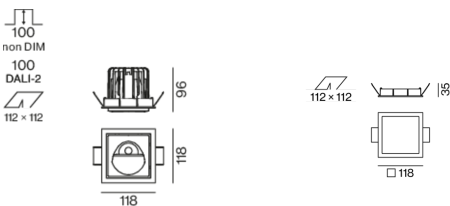

<sup>1</sup> RAL code <sup>2</sup> Value of containing product at full load (undimmed)  
<sup>3</sup> incl. optical losses and the efficiency of the operating device (converter)  
<sup>4</sup> incl. optical losses

### Installation instructions



### Lighting calculator

