

# SASSO 100 square wallwasher/floor

trim

048-2750614W 048-279731G 002-90777



Project / Type \_\_\_\_\_

Notes \_\_\_\_\_

Count / Date \_\_\_\_\_



## General

Ceiling , Recessed \_\_\_\_\_

matt silver \_\_\_\_\_

Mounting set white aluminium \_\_\_\_\_

IP20 \_\_\_\_\_

2050 lm \_\_\_\_\_

## LED

4000 K \_\_\_\_\_

CRI  $\geq$  90 \_\_\_\_\_

L80 / 50000 h \_\_\_\_\_

initial MacAdam  $\leq$  2 SDCM \_\_\_\_\_

R<sub>g</sub>: 97 , R<sub>r</sub>: 90 , R<sub>t(1-15)</sub>: 89 \_\_\_\_\_

MR 0.81 \_\_\_\_\_

MDER 0.74 \_\_\_\_\_

## Optical

wallwasher floor \_\_\_\_\_

PstLM  $\leq$  1.0 <sup>1</sup> \_\_\_\_\_

SVM  $\leq$  0.4 <sup>1</sup> \_\_\_\_\_

## Electrical

non DIM \_\_\_\_\_

system 19.2 W \_\_\_\_\_

inset 16.3 W \_\_\_\_\_

36 Vf \_\_\_\_\_

500 mA \_\_\_\_\_

PC2 220-240V \_\_\_\_\_

system 107 lm/W<sup>2</sup> \_\_\_\_\_

inset 126 lm/W<sup>3</sup> \_\_\_\_\_

## Physical

trim \_\_\_\_\_

length 118 mm \_\_\_\_\_

width 118 mm \_\_\_\_\_

height 96 mm \_\_\_\_\_

0.71 kg \_\_\_\_\_

## Cutout

length 112 mm \_\_\_\_\_


width 112 mm \_\_\_\_\_

min. ceiling thickness 2 mm \_\_\_\_\_


max. ceiling thickness 25 mm \_\_\_\_\_

recessed depth 100 mm \_\_\_\_\_

## Light distribution



## Product drawing

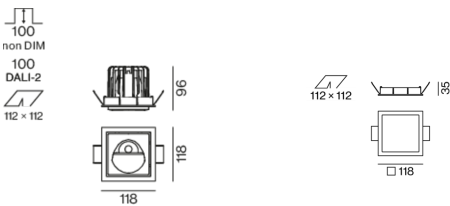

<sup>1</sup> Value of containing product at full load (undimmed)

<sup>2</sup> incl. optical losses and the efficiency of the operating device (converter)

<sup>3</sup> incl. optical losses

## Installation instructions



## Lighting calculator

