

# SASSO 100 square wallwasher/floor

trim

048-2750514W 048-279731G 002-90777



Project / Type	
Notes	
Count / Date	



## General

Ceiling , Recessed
matt silver
Mounting set white aluminium
IP20
1990 lm

## LED

3000 K
CRI ≥ 90
L80 / 50000 h
initial MacAdam ≤ 2 SDCM
R <sub>g</sub> : 100 , R <sub>f</sub> : 91 , R <sub>(1-15)</sub> : 88
MR 0.59
MDER 0.53

## Optical

wallwasher floor
PstLM ≤ 1.0 <sup>1</sup>
SVM ≤ 0.4 <sup>1</sup>

## Electrical

non DIM
system 19.2 W
inset 16.3 W
36 Vf
500 mA
PC2 220-240V
system 104 lm/W <sup>2</sup>
inset 122 lm/W <sup>3</sup>

## Physical


trim
length 118 mm
width 118 mm
height 96 mm
0.71 kg

## Cutout


length 112 mm
width 112 mm
min. ceiling thickness 2 mm
max. ceiling thickness 25 mm
recessed depth 100 mm

<sup>1</sup> Value of containing product at full load (undimmed)  
<sup>2</sup> incl. optical losses and the efficiency of the operating device (converter)  
<sup>3</sup> incl. optical losses

## Light distribution



## Product drawing

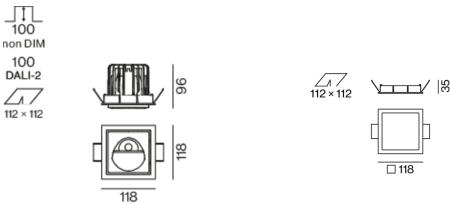

## Installation instructions



## Lighting calculator

