

# SASSO 100 square wallwasher/floor

trim


048-2750611W 048-2797318 002-90774



Project / Type

Notes

Count / Date

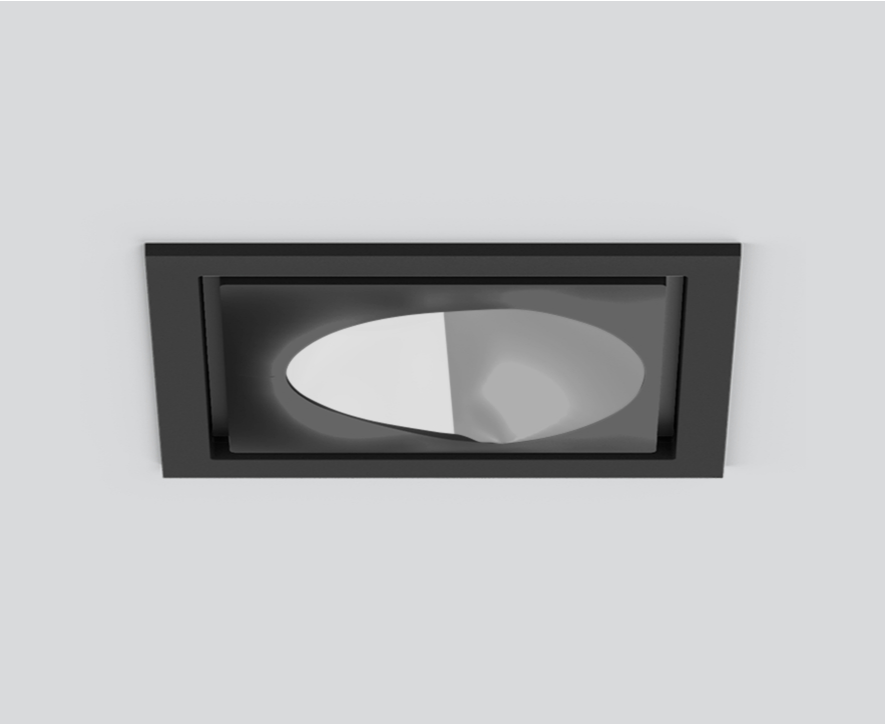

### General

Ceiling , Recessed

black , RAL9005 <sup>1</sup>

Mounting set jet black

IP20

2720 lm

### LED

4000 K

CRI ≥ 90

L80 / 50000 h

initial MacAdam ≤ 2 SDCM

R<sub>g</sub>: 97 , R<sub>r</sub>: 90 , R<sub>t(1-15)</sub>: 89

MR 0.81

MDER 0.74

### Optical

wallwasher floor

PstLM ≤ 1.0 <sup>2</sup>

SVM ≤ 0.4 <sup>2</sup>

### Electrical

non DIM

system 27.5 W

inset 23.4 W

36 Vf

700 mA

PC2 220-240V

system 99 lm/W<sup>3</sup>

inset 116 lm/W<sup>4</sup>

### Physical

trim

length 118 mm

width 118 mm

height 96 mm

0.69 kg

### Cutout

length 112 mm

width 112 mm

min. ceiling thickness 2 mm

max. ceiling thickness 25 mm


recessed depth 100 mm

<sup>1</sup> RAL code <sup>2</sup> Value of containing product at full load (undimmed)

<sup>3</sup> incl. optical losses and the efficiency of the operating device (converter)

<sup>4</sup> incl. optical losses

### Light distribution



### Product drawing



### Installation instructions



### Lighting calculator



[\*048-2750611W 048-2797318 002-90774\*] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of XAL GmbH apply.

© XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · [www.xal.com](http://www.xal.com)