

# SASSO 100 square wallwasher/floor

trim

048-2750411W 048-2797317 002-90774



Project / Type

Notes

Count / Date



### General

Ceiling , Recessed

black , RAL9005 <sup>1</sup>

Mounting set traffic white

IP20

2480 lm

### LED

2700 K

CRI ≥ 90

L80 / 50000 h

initial MacAdam ≤ 2 SDCM

R<sub>g</sub>: 99 , R<sub>r</sub>: 91 , R<sub>(1-15)</sub>: 89

MR 0.53

MDER 0.48

### Optical

wallwasher floor

PstLM ≤ 1.0 <sup>2</sup>

SVM ≤ 0.4 <sup>2</sup>

### Electrical

non DIM

system 27.5 W

inset 23.4 W

36 Vf

700 mA

PC2 220-240V

system 90 lm/W<sup>3</sup>

inset 106 lm/W<sup>4</sup>

### Physical

trim

length 118 mm

width 118 mm

height 96 mm

0.69 kg

### Cutout

length 112 mm

width 112 mm

min. ceiling thickness 2 mm

max. ceiling thickness 25 mm


recessed depth 100 mm

<sup>1</sup> RAL code <sup>2</sup> Value of containing product at full load (undimmed)


<sup>3</sup> incl. optical losses and the efficiency of the operating device (converter)

<sup>4</sup> incl. optical losses

### Light distribution



### Product drawing

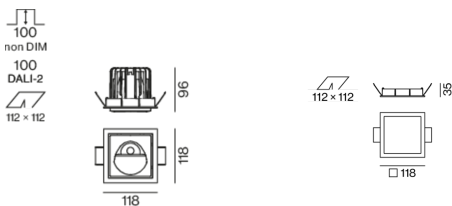

### Installation instructions



### Lighting calculator

