

# SASSO 60 round adjustable

trimless exposed concrete

048-2622E17F 048-2695210 002-90762



Project / Type

Notes

Count / Date



## General

Ceiling , Recessed  
 tilt max 30°  
 rotation 360°  
 white , RAL9016 <sup>1</sup>  
 Mounting set white aluminium  
 front IP40 , back IP20  
 729 lm

## LED

colour warm dimming  
 1800 K - 3000 K  
 CRI ≥ 90  
 L85 / 50000 h  
 initial MacAdam ≤ 3 SDCM  
 R<sub>g</sub>: 101 , R<sub>r</sub>: 94 , R<sub>{1-15}</sub>: 96  
 MR 0.64  
 MDER 0.58

## Optical

flood  
 beam angle 36°  
 UGR < 19  
 P<sub>stLM</sub> ≤ 1.0 <sup>2</sup>  
 SVM ≤ 0.4 <sup>2</sup>

## Electrical

DALI-2  
 system 12.0 W  
 inset 10.2 W  
 300 mA  
 PC2 220-240V  
 system 61 lm/W<sup>3</sup>  
 inset 71 lm/W<sup>4</sup>  
 1 DALI Addr.

## Physical


trimless for exposed concrete ceiling  
 length 230 mm  
 width 230 mm  
 height 162 mm  
 2.41 kg

## Cutout


recessed depth 120 mm

Round recessed spotlight in die-cast aluminium; 1 lamp; surface white; 360° rotatable and 30° tiltable; installation without tools in mounting set due to patented ball catch system; concrete housings for exposed concrete ceilings; for trimless installation; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; CWD (Colour Warm Dimming) of 1800K - 3000K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 90; min. 85% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; incl. high quality lens system; precise radiation characteristic with 36° beam; UGR ≤ 19; degree of protection from below IP40 (from above IP20); PC2 220-240V; incl. DALI-2 converter; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

## Light distribution



## Product drawing

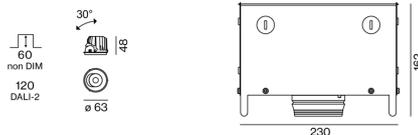

<sup>1</sup> RAL code <sup>2</sup> Value of containing product at full load (undimmed)  
<sup>3</sup> incl. optical losses and the efficiency of the operating device (converter)  
<sup>4</sup> incl. optical losses

## Installation instructions



## Lighting calculator



# SASSO 60 round adjustable

trimless exposed concrete

048-2622E17F 048-2695210 002-90762



Project / Type \_\_\_\_\_

Notes \_\_\_\_\_

Count / Date \_\_\_\_\_

## Maintenance Factors

Operating Time [h]	10 000	20 000	30 000	40 000	50 000
LLMF	0.96	0.94	0.91	0.89	0.86
LSF	1	1	1	1	1

MF	LMF × RSMF × LLMF × LSF	RSMF <sup>a</sup>	Room Surface Maintenance Factor
MF	Maintenance Factor	LLMF	Lamp Lumens Maintenance Factor
LMF <sup>a</sup>	Luminaire Maintenance Factor	LSF	Lamp Survival Faktor

<sup>a</sup> According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.

## Circuit Breaker Types

Automatic Circuit Breaker Type	Number of Fixtures
B10	18
B16	30
C10	23
C16	36

## Components

### EXPOSED CONCRETE MOUNTING HOUSING

COLOUR	L-W-H (MM)	ARTICLE NUMBER(S)
white aluminium	230-230-162	048-2695210



### CONVERTER

TYPE	L-W-H (MM)	ARTICLE NUMBER(S)
28 W	143-43-30	002-90762

