

TASK table table-clamp


059-28110780 059-2892118



Project / Type

Notes

Count / Date

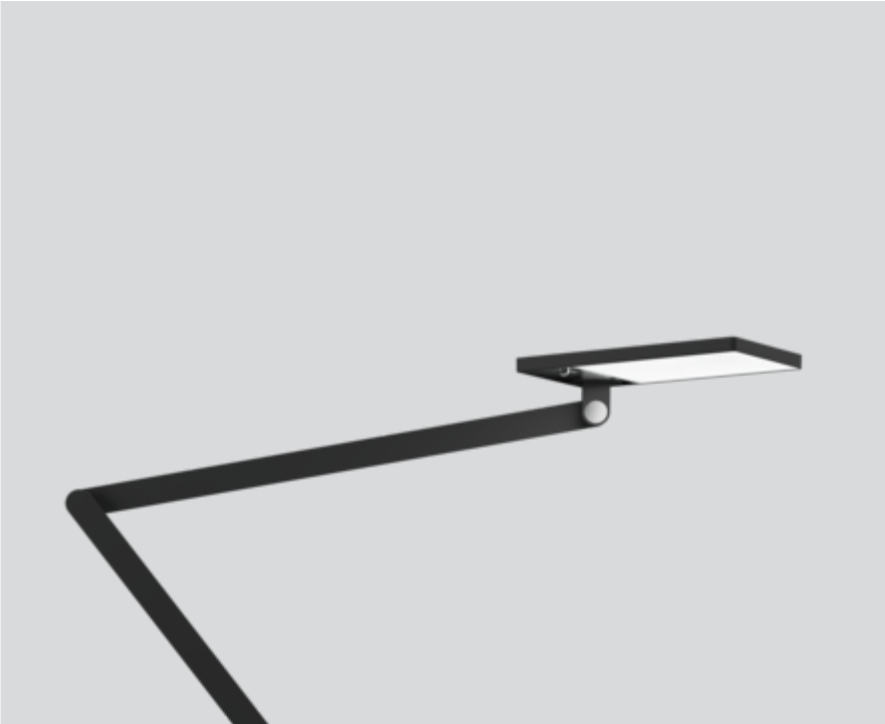

General

Table , Standing

tilt min -15°

tilt max 15°

rotation 360°

black , RAL 9005 ¹

Mounting jet black

IP20

950 lm

LED

3000 K

CRI ≥ 90

L90 / 50000 h

initial MacAdam ≤ 3 SDCM

R_g: 96 , R_r: 90 , R_{t(1-15)}: 90

MR 0.61

MDER 0.56

Optical

Opal

opal (lambertsch)

Electrical

touch DIM & presence sensor

220-240 V

system 11.0 W

system 86 lm/W²

PC2

Physical

table-clamp

length 227 mm


width 120 mm

height 880 mm


1.34 kg

Desk lamp in puristic design, with rectangular lamp head with rounded edges in aluminium; extremely flat design (only 15mm); lamp head 360° rotatable and +/- 15° tiltable; lamp arm with 3 joints for maximum flexibility; surface black powder coated; direct light distribution through LGP body (Light Guiding Prism); side coupled light directed downwards by laser engraving; opal PMMA cover; completely homogeneous illumination; light colour 3000 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 90; min. 90% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; degree of protection IP20; PC2; 220-240 V; continuously adjustable dimming via optical sensor (10-100% analog); presence detector; integrated USB charging socket for charging of a smart device; external power supply for converter with power plug; incl. table clamp; light source not replaceable; control gear replaceable by an authorized professional;

Light distribution



Product drawing



¹ RAL code
² FIXTURE: incl. consideration of optical losses & internal control unit losses SYSTEM: incl. consideration of optical losses, internal control unit losses & operating device efficiency.

Installation instructions



TASK table table-clamp

059-2811078O 059-2892118



Project / Type

Notes

Count / Date

Components

TABLE CLAMP

TYPE	COLOUR	Ø (MM)	ARTICLE NUMBER(S)
for hole ø 68 mm	jet black	75	059-2892118

