

SASSO 100 round downlight

trimless


048-2700E17M 048-2796117 002-90776



Project / Type

Notes

Count / Date



General

Ceiling , Recessed
white , RAL9016 ¹
Mounting set traffic white
front IP40 , back IP20
2040 lm

LED

colour warm dimming
1800 K - 3000 K
CRI ≥ 90
L90 / 50000 h
initial MacAdam ≤ 3 SDCM
R_g: 100 , R_f: 89 , R_{f(1-15)}: 89
MR 0.56
MDER 0.51

Optical

medium
beam angle 34°
PstLM ≤ 1.0 ²
SVM ≤ 0.4 ²

Electrical

DALI-2
system 28.0 W
inset 23.8 W
700 mA
PC2 220-240V
system 73 lm/W³
inset 86 lm/W⁴
1 DALI Addr.

Physical


trimless
diameter 105 mm
height 75 mm
0.52 kg

Cutout


diameter 106 mm
min. ceiling thickness 12.5 mm
max. ceiling thickness 25 mm
recessed depth 80 mm

Round recessed spotlight in die-cast aluminium; 1 lamp; surface white; installation without tools in mounting set due to patented ball catch system; round installation housing; for trimless installation in plasterboard ceilings; suitable for ceiling thickness of 12.5/15/25 mm; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; CWD (Colour Warm Dimming) of 1800K - 3000K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 90; min. 90% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; incl. high quality lens system; precise radiation characteristic with 34° beam; degree of protection from below IP40 (from above IP20); PC2 220-240V; incl. DALI-2 converter; through wiring connection box, 3-pole or 5-pole, available as an accessory; accessories are listed separately; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Light distribution



Product drawing

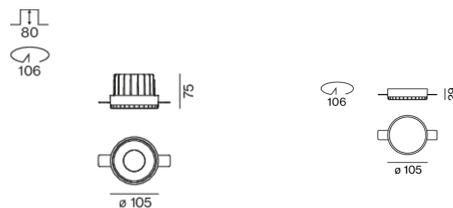

¹ RAL code ² Value of containing product at full load (undimmed)

³ incl. optical losses and the efficiency of the operating device (converter)

⁴ incl. optical losses

Installation instructions



Lighting calculator

