

SASSO 100 round downlight

trimless exposed concrete

048-2700E17M 048-2795210 002-90776



Project / Type _____

Notes _____

Count / Date _____



360° rotation icon

220-240V icon

IP20 / IP40 icon

X-PERT icon

X-PERT icon

General

Ceiling , Recessed _____

rotation 360° _____

white , RAL9016 ¹ _____

Mounting set white aluminium _____

front IP40 , back IP20 _____

2040 lm _____

LED

colour warm dimming _____

1800 K - 3000 K _____

CRI ≥ 90 _____

L90 / 50000 h _____

initial MacAdam ≤ 3 SDCM _____

R_g: 100 , R_f: 89 , R₍₁₋₁₅₎: 89 _____

MR 0.56 _____

MDER 0.51 _____

Optical

medium _____

beam angle 34° _____

PstLM ≤ 1.0 ² _____

SVM ≤ 0.4 ² _____

Electrical

DALI-2 _____

system 28.0 W _____

inset 23.8 W _____

700 mA _____

PC2 220-240V _____

system 73 lm/W³ _____

inset 86 lm/W⁴ _____

1 DALI Addr. _____

Physical

trimless for exposed concrete ceiling _____

length 230 mm _____

width 230 mm _____

height 162 mm _____


2.62 kg _____

Cutout


recessed depth 80 mm _____

Round recessed spotlight in die-cast aluminium; 1 lamp; surface white; installation without tools in mounting set due to patented ball catch system; concrete housings for exposed concrete ceilings; for trimless installation; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; CWD (Colour Warm Dimming) of 1800K - 3000K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 90; min. 90% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; incl. high quality lens system; precise radiation characteristic with 34° beam; degree of protection from below IP40 (from above IP20); PC2 220-240V; incl. DALI-2 converter; through wiring connection box, 3-pole or 5-pole, available as an accessory; accessories are listed separately; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Light distribution



Product drawing

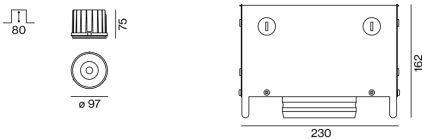

¹ RAL code ² Value of containing product at full load (undimmed)

³ incl. optical losses and the efficiency of the operating device (converter)

⁴ incl. optical losses

Installation instructions



Lighting calculator

