

SPIO 60 adjustable

trimless

048-1520517W 048-1598107 002-90788



Project / Type	
Notes	
Count / Date	




Round recessed spotlight in die-cast aluminium; surface white powder coated; installation without tools in mounting set with magnetic attachment; for trimless installation in plasterboard ceilings, specially designed trim with grooves for better adhesion of smoothing compound; suitable for ceiling thickness of 12.5/15/25 mm; paintable cover; shadow joint between cover and mounting set optionally fillable; 360° rotatable and 30° tiltable; passive cooling of the LEDs through improved heat sink geometry; light colour 3000 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 90 ; min. 85% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; incl. high quality lens system; precise radiation characteristic with 44° beam; no multiple shadows; uncluttered ceiling look through recessed lighting level; reduced light-emitting surface (only $\varnothing 10$ mm); degree of protection IP20; PC2; 220-240 V; incl. DALI-2 converter; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Light distribution



Product drawing

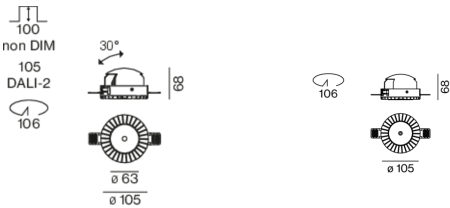

General

Ceiling , Recessed	
tilt max 30°	
rotation 360°	
white , RAL 9016 ¹	
Mounting set traffic white	
IP20	
685 lm	
fixture 58 lm/W ²	

LED

3000 K	
CRI ≥ 90	
L85 / 50000 h	
initial MacAdam ≤ 3 SDCM	
R _g : 104 , R _f : 91 , R _{1-15} : 92	
MR 0.59	
MDER 0.54	

Optical

wide flood	
beam angle 44°	
PstLM ≤ 1.0 ³	
SVM ≤ 0.4 ³	

Electrical

DALI-2	
220-240 V	
system 14.0 W	
fixture 11.9 W	
12 Vf	
1050 mA	
PC2	
1 DALI Addr.	

Physical

trimless	
diameter 105 mm	
height 68 mm	
0.33 kg	

Cutout

diameter 106 mm	
min. ceiling thickness 12.5 mm	
max. ceiling thickness 25 mm	
recessed depth 105 mm	

¹ RAL code
² FIXTURE: incl. consideration of optical losses & internal control unit losses SYSTEM: incl. consideration of optical losses, internal control unit losses & operating device efficiency.
³ Value of containing product at full load (undimmed)



SPIO 60 adjustable

trimless

048-1520517W 048-1598107 002-90788



Project / Type

Notes

Count / Date

Installation
instructions



Lighting
calculator



SPIO 60 adjustable

trimless

048-1520517W 048-1598107 002-90788



Project / Type

Notes

Count / Date

Maintenance Factors

Operating Time [h]	10 000	20 000	30 000	40 000	50 000
LLMF	1	1	0.99	0.97	0.96
LSF	1	1	1	1	1
MF	LMF × RSMF × LLMF × LSF		RSMF ^a	Room Surface Maintenance Factor	
MF	Maintenance Factor		LLMF	Lamp Lumens Maintenance Factor	
LMF ^a	Luminaire Maintenance Factor		LSF	Lamp Survival Faktor	

^a According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.

Circuit Breaker Types

Automatic Circuit Breaker Type	Number of Fixtures
B10	37
B16	60
C10	37
C16	60

Components

MOUNTING SET trimless

TYPE	COLOUR	Ø (MM)	ARTICLE NUMBER(S)
for plasterboard ceilings 12.5/15/25 mm	traffic white	105	048-1598107



POWER SUPPLY

TYPE	L-W-H (MM)	ARTICLE NUMBER(S)
44 W	143-43-30	002-90788



Optional electrical accessories

DIN RAIL POWER SUPPLY

TYPE	L-W-H (MM)	ARTICLE NUMBER(S)
160 W	72-90-63	005-6520210



DIN RAIL LED DRIVER

TYPE	L-W-H (MM)	ARTICLE NUMBER(S)
DALI-2 200-1050 mA 2 x 42W	36-88-59	005-6121030

