

SPIO 60 adjustable

trim

048-1520517W 048-1597107 002-90788



Project / Type

Notes

Count / Date



General

Ceiling , Recessed

tilt max 30°

rotation 360°

white , RAL9016 ¹

Mounting set traffic white

IP20

685 lm

LED

3000 K

CRI ≥ 90

L85 / 50000 h

initial MacAdam ≤ 3 SDCM

R_g: 104 , R_f: 91 , R_{f(1-5)}: 92

MR 0.59

MDER 0.54

Optical

wide flood

beam angle 44°

PstLM ≤ 1.0 ²

SVM ≤ 0.4 ²

Electrical

DALI-2

14.0 W

inset 11.9 W

12 Vf

1050 mA

PC2 220-240V

49 lm/W

inset 58 lm/W

1 DALI Addr.

Physical

trim

diameter 118 mm

height 68 mm

0.53 kg

Cutout

diameter 108 mm

min. ceiling thickness 2 mm


max. ceiling thickness 25 mm

recessed depth 70 mm


¹ RAL code ² Value of containing product at full load (undimmed)

Round recessed spotlight in die-cast aluminium; surface white powder coated; installation without tools in mounting set with magnetic attachment; recessed light with wrap around edge; suitable for ceiling thickness of 2-25 mm; 360° rotatable and 30° tiltable; passive cooling of the LEDs through improved heat sink geometry; light colour 3000 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 90; min. 85% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; incl. high quality lens system; precise radiation characteristic with 44° beam; no multiple shadows; uncluttered ceiling look through recessed lighting level; reduced light-emitting surface (only ø 10 mm); degree of protection IP20; PC2 220-240V; incl. DALI-2 converter; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Light distribution



Product drawing

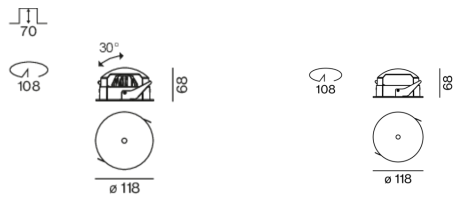

Installation instructions



Lighting calculator



[‘048-1520517W 048-1597107 002-90788’] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of XAL GmbH apply.
© XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · www.xal.com

03.11.2024