

SPIO 60 adjustable

trim

048-1520517F 048-1597107 002-90787



Project / Type


Notes

Count / Date




Round recessed spotlight in die-cast aluminium; surface white powder coated; installation without tools in mounting set with magnetic attachment; recessed light with wrap around edge; suitable for ceiling thickness of 2-25 mm; 360° rotatable and 30° tiltable; passive cooling of the LEDs through improved heat sink geometry; light colour 3000 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 90 ; min. 85% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; incl. high quality lens system; precise radiation characteristic with 34° beam; no multiple shadows; uncluttered ceiling look through recessed lighting level; reduced light-emitting surface (only $\varnothing 10$ mm); degree of protection IP20; PC2; incl. converter, non dimmable; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Light distribution



Product drawing

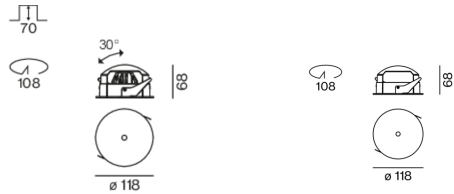

General

Ceiling , Recessed

tilt max 30°

rotation 360°

white , RAL9016 ¹

Mounting set traffic white

IP20

466 lm

LED

3000 K

CRI ≥ 90

L85 / 50000 h

initial MacAdam ≤ 3 SDCM

R_g: 104 , R_f: 91 , R_{f(1-5)}: 92

MR 0.59

MDER 0.54

Optical

flood

beam angle 34°

UGR < 10

PstLM ≤ 1.0 ²

SVM ≤ 0.4 ²

Electrical

non DIM

220-240 V

system 14.0 W

inset 11.9 W

12 Vf

1050 mA

PC2

system 33 lm/W³

inset 39 lm/W³

Physical

trim

diameter 118 mm

height 68 mm

0.49 kg

Cutout

diameter 108 mm

min. ceiling thickness 2 mm

max. ceiling thickness 25 mm

recessed depth 70 mm

¹ RAL code ² Value of containing product at full load (undimmed)
³ incl. optical losses and the efficiency of the operating device (converter)



SPIO 60 adjustable

trim

048-1520517F 048-1597107 002-90787



Project / Type

Notes

Count / Date

Installation
instructions



Lighting
calculator



SPIO 60 adjustable

trim

048-1520517F 048-1597107 002-90787



Project / Type

Notes

Count / Date

Maintenance Factors

| Operating Time [h] | 10 000 | 20 000 | 30 000 | 40 000 | 50 000 |
|--------------------|------------------------------|--------|-------------------|---------------------------------|--------|
| LLMF | 1 | 1 | 0.99 | 0.97 | 0.96 |
| LSF | 1 | 1 | 1 | 1 | 1 |
| MF | LMF × RSMF × LLMF × LSF | | RSMF ^a | Room Surface Maintenance Factor | |
| MF | Maintenance Factor | | LLMF | Lamp Lumens Maintenance Factor | |
| LMF ^a | Luminaire Maintenance Factor | | LSF | Lamp Survival Faktor | |

^a According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.

Circuit Breaker Types

| Automatic Circuit Breaker Type | Number of Fixtures |
|--------------------------------|--------------------|
| B10 | 17 |
| B13 | 21 |
| B16 | 27 |
| B20 | 33 |
| B25 | 42 |
| C10 | 28 |
| C13 | 36 |
| C16 | 45 |
| C20 | 56 |
| C25 | 70 |

Components

MOUNTING SET with trim

| TYPE | COLOUR | Ø (MM) | ARTICLE NUMBER(S) |
|---------------------------|---------------|--------|-------------------|
| for intermediate ceilings | traffic white | 118 | 048-1597107 |



POWER SUPPLY

| TYPE | L-W-H (MM) | ARTICLE NUMBER(S) |
|------|------------|-------------------|
| 22 W | 111-38-28 | 002-90787 |



Optional electrical accessories

DIN RAIL POWER SUPPLY

| TYPE | L-W-H (MM) | ARTICLE NUMBER(S) |
|-------|------------|-------------------|
| 160 W | 72-90-63 | 005-6520210 |



DIN RAIL LED DRIVER

| TYPE | L-W-H (MM) | ARTICLE NUMBER(S) |
|--------------------------------|------------|-------------------|
| DALI-2 200-1050 mA 2 x 42W | 36-88-59 | 005-6121030 |

