


BETO direct / indirect power

free standing U-shape

074-6954617B



Project / Type	
Notes	
Count / Date	

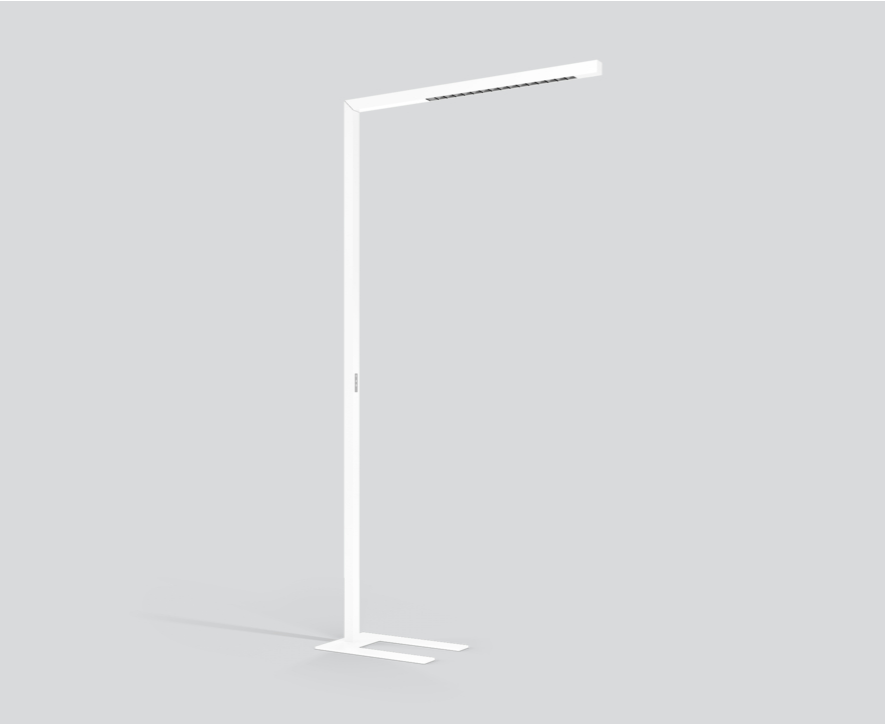

General

Floor , Standing	
white , RAL 9010 ¹	
Reflector dark chrome	
IP20	
indirect 7550 lm	
direct 1700 lm	
total 9250 lm	

LED

4000 K	
CRI ≥ 80	
L90 / 50000 h	
initial MacAdam ≤ 3 SDCM	
MR 0.72	
MDER 0.65	

Optical

Reflector	
asymmetric	
UGR < 10	
PstLM ≤ 1.0 ²	
SVM ≤ 0.4 ²	

Electrical


touch DIM on pole	
220-240 V	
system 66 W	
system 140 lm/W ³	
PC1	

Physical


U-shape	
length 1055 mm	
width 42 mm	
height 2100 mm	

¹ RAL code ² Value of containing product at full load (undimmed)
³ FIXTURE: incl. consideration of optical losses & internal control unit losses SYSTEM: incl. consideration of optical losses, internal control unit losses & operating device efficiency.

Light distribution



Product drawing



Installation instructions

