

MINO 60 mid lumen


ceiling offset
046-47L3617H



Project / Type

Notes

Count / Date

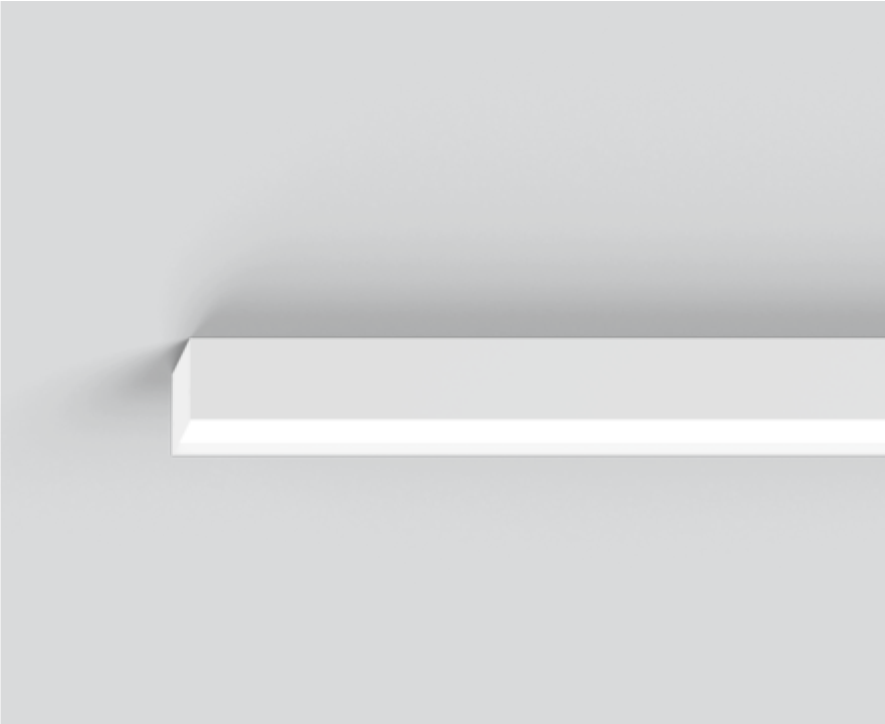

RG0

IEC 62471

220-240V

X-PERT

X-PERT

General

Ceiling , Surface

white , RAL9010 ¹

1560 lm/m

IP20

Ball impact resistant DIN 18032-3

1360 lm

LED

4000 K

CRI ≥ 80

L90 / 50000 h

photobio. safety RG 0 - no Risk

initial MacAdam ≤ 3 SDCM

MR 0.72

MDER 0.65

Optical

High Performance Opal

opal (lambertsch)

PstLM ≤ 1.0 ²

SVM ≤ 0.4 ²

Electrical

non DIM

10.3 W

PC1 220-240V

132 lm/W

12 W/m

Physical

length 875 mm


width 60 mm

height 90 mm


2.44 kg

¹ RAL code ² Value of containing product at full load (undimmed)

Light distribution



Product drawing



Installation instructions



Lighting calculator



[‘046-47L3617H’] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of XAL GmbH apply.
© XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · www.xal.com