


INO 750 square

suspended

034-444263GH



Project / Type
Notes
Count / Date

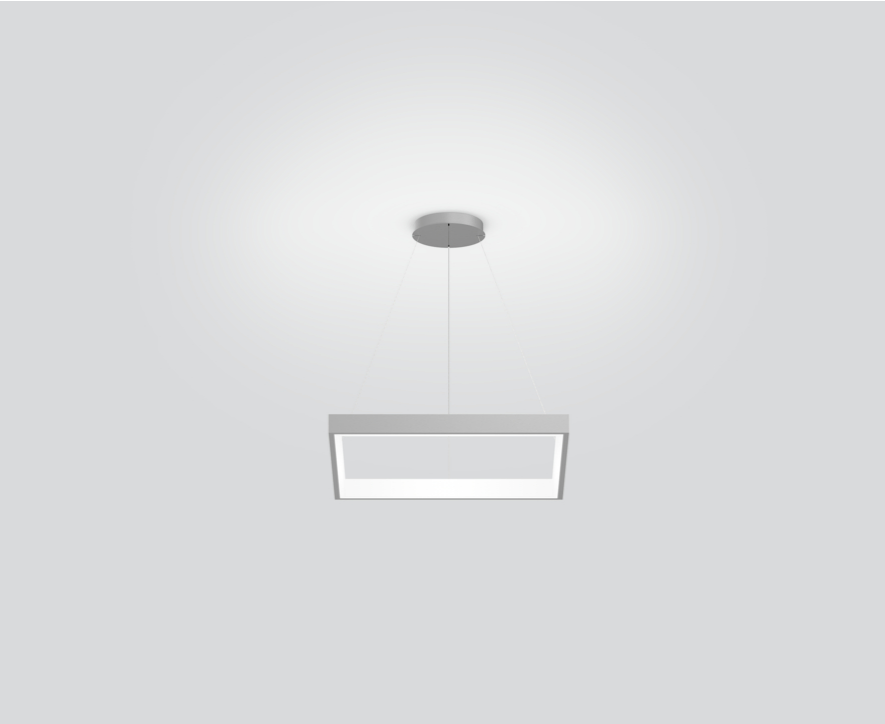

General

Ceiling , Suspended
grey , RAL 9006 ¹
IP20
indirect 2190 lm
direct 2200 lm
total 4390 lm

LED

4000 K
CRI ≥ 90
L90 / 50000 h
initial MacAdam ≤ 3 SDCM
R _g : 99 , R _f : 92 , R ₍₁₋₁₅₎ : 90
MR 0.81
MDER 0.74

Optical

High Performance Opal
opal (lambertsch)
PstLM ≤ 1.0 ²
SVM ≤ 0.4 ²

Electrical


DALI-2
220-240 V
system 39 W
system 113 lm/W ³
PC1
1 DALI Addr.

Physical


cable 2000 mm
length 765 mm
width 765 mm
height 60 mm
3.5 kg

¹ RAL code ² Value of containing product at full load (undimmed)
³ FIXTURE: incl. consideration of optical losses & internal control unit losses SYSTEM: incl. consideration of optical losses, internal control unit losses & operating device efficiency.

Light distribution



Product drawing



Installation instructions



Lighting calculator

