


INO TRIPLE circle

suspended

034-3845638H



| | |
|----------------|--|
| Project / Type | |
| Notes | |
| Count / Date | |

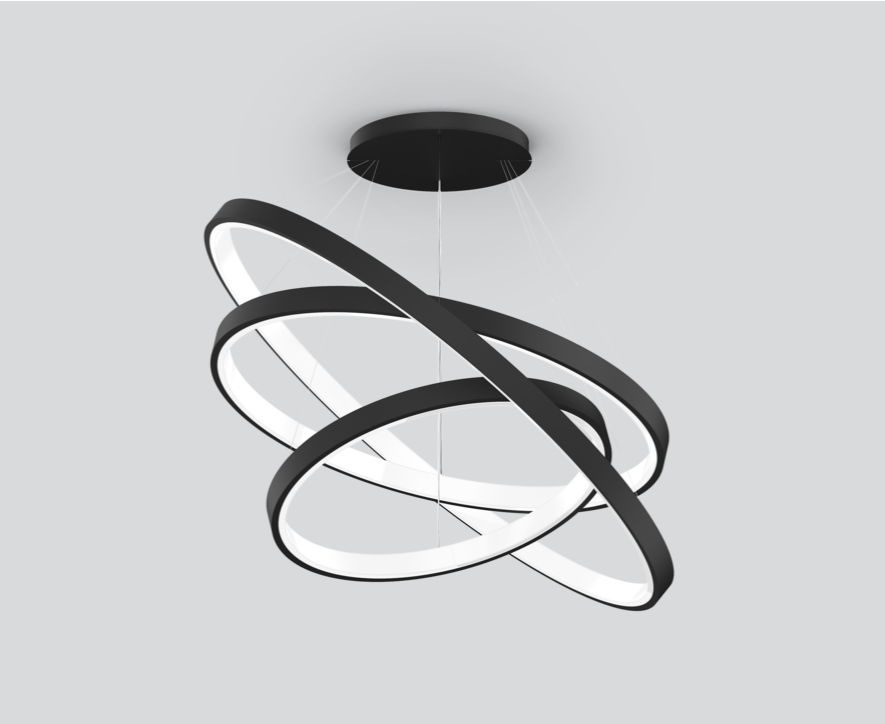

3 pcs. ring-shaped light fittings in rolled and seamlessly welded extruded aluminium profile; surface black powder coated; suspended luminaire with 5000mm cable suspension (canopy central); height adjustment without tools; light fitting individually height adjustable; incl. transparent feed; 3 pcs. electronic operating units installed in the canopy; light colour 4000 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 90 ; min. 90% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; HPO (High Performance Opal) cover for uniform illumination; inwards facing emission characteristics; direct/indirect light emission for additional accentuation of the ceiling; canopy with 2 cable openings and plug-in terminal for through wiring; degree of protection IP20; PC1; internal wiring in light halogen free; incl. 3 pcs. DALI-2 converters; light fitting separately controllable; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Product drawing



General

| | |
|-------------------------------|--|
| Ceiling , Suspended | |
| black , RAL 9005 ¹ | |
| IP20 | |
| direct 15300 lm | |
| total 18500 lm | |

LED

| | |
|---|--|
| 4000 K | |
| CRI ≥ 90 | |
| L90 / 50000 h | |
| initial MacAdam ≤ 3 SDCM | |
| R _g : 99 , R _r : 92 , R _{t(1-15)} : 90 | |
| MR 0.81 | |
| MDER 0.74 | |

Optical

| | |
|-------------------------------|--|
| High Performance Opal | |
| opal (lambertsch) | |
| PstLM ≤ 1.0 ² | |
| SVM ≤ 0.4 ² | |

Electrical

| | |
|--------------|--|
| DALI-2 | |
| 220-240 V | |
| system 150 W | |
| PC1 | |
| 3 DALI Addr. | |

Physical

| | |
|------------------|--|
| cable 5000 mm | |
| diameter 1455 mm | |
| height 60 mm | |
| 5.4 kg | |

¹ RAL code ² Value of containing product at full load (undimmed)

Installation instructions

