


INO TRIPLE circle

suspended

034-3845538H



Project / Type	
Notes	
Count / Date	

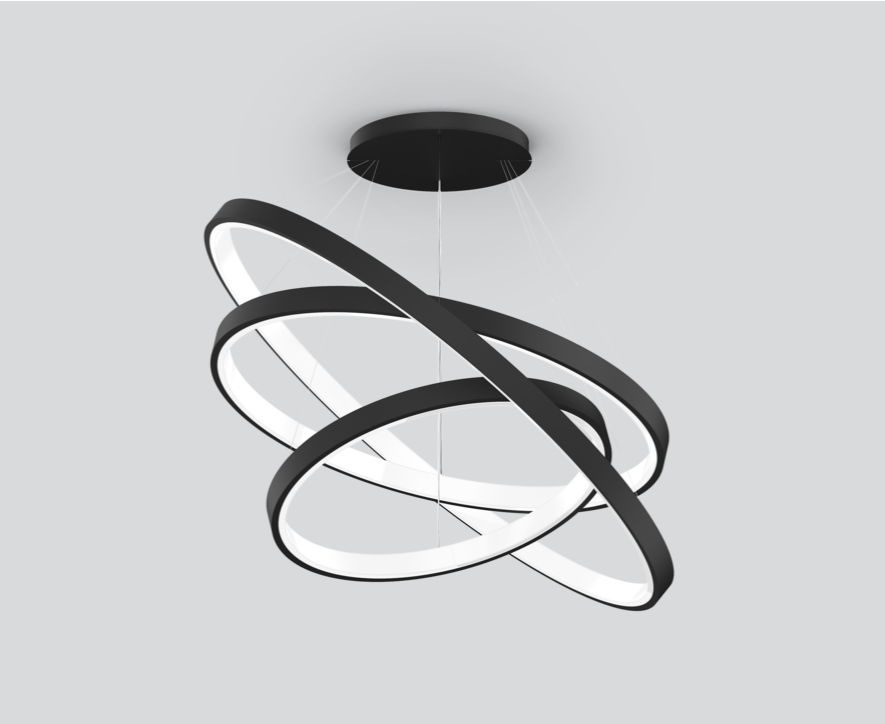

3 pcs. ring-shaped light fittings in rolled and seamlessly welded extruded aluminium profile; surface black powder coated; suspended luminaire with 5000mm cable suspension (canopy central); height adjustment without tools; light fitting individually height adjustable; incl. transparent feed; 3 pcs. electronic operating units installed in the canopy; light colour 3000 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 90 ; min. 90% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; HPO (High Performance Opal) cover for uniform illumination; inwards facing emission characteristics; direct/indirect light emission for additional accentuation of the ceiling; canopy with 2 cable openings and plug-in terminal for through wiring; degree of protection IP20; PC1; internal wiring in light halogen free; incl. 3 pcs. DALI-2 converters; light fitting separately controllable; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Product drawing



General

Ceiling , Suspended
black , RAL 9005 ¹
IP20
direct 14600 lm
total 17500 lm

LED

3000 K
CRI ≥ 90
L90 / 50000 h
initial MacAdam ≤ 3 SDCM
R _g : 99 , R _r : 91 , R _{t(1-15)} : 89
MR 0.61
MDER 0.55

Optical

High Performance Opal
opal (lambertsch)
PstLM ≤ 1.0 ²
SVM ≤ 0.4 ²

Electrical

DALI-2
220-240 V
system 150 W
PC1
3 DALI Addr.

Physical

cable 5000 mm
diameter 1455 mm
height 60 mm
5.4 kg

¹ RAL code ² Value of containing product at full load (undimmed)

Installation instructions

