

SASSO 100 round downlight

trimless

048-2700617X 048-2796117 002-90776



Project / Type _____

Notes _____

Count / Date _____



↑ IP20
↓ IP44

220-240V

X-PERT

CRI
≥ 90

DALI
1 ADDR.

X-PERT

General

Ceiling , Recessed

white , RAL9016 ¹

Mounting set traffic white

front IP44 , back IP20

2170 lm

LED

4000 K

CRI ≥ 90

L80 / 50000 h

initial MacAdam ≤ 2 SDCM

R_g: 97 , R_f: 90 , R_{t(1-15)}: 89

MR 0.81

MDER 0.74

Optical

super wide flood

beam angle 69°

PstLM ≤ 1.0 ²

SVM ≤ 0.4 ²

Electrical

DALI-2

29.2 W

inset 24.8 W

36 Vf

700 mA

PC2 220-240V

74 lm/W

inset 87 lm/W

1 DALI Addr.

Physical

trimless

diameter 105 mm

height 75 mm

0.55 kg

Cutout

diameter 106 mm


min. ceiling thickness 12.5 mm

max. ceiling thickness 25 mm


recessed depth 80 mm

¹ RAL code ² Value of containing product at full load (undimmed)

Light distribution



Product drawing

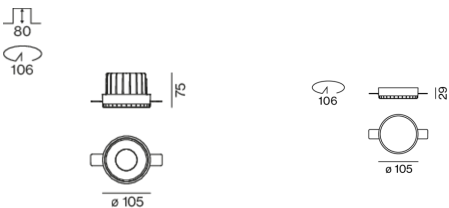

Installation instructions



Lighting calculator

