


MOVE IT 25 / 45

ACOUSTIC double grid

inlay
050-231321W



| | |
|----------------|--|
| Project / Type | |
| Notes | |
| Count / Date | |

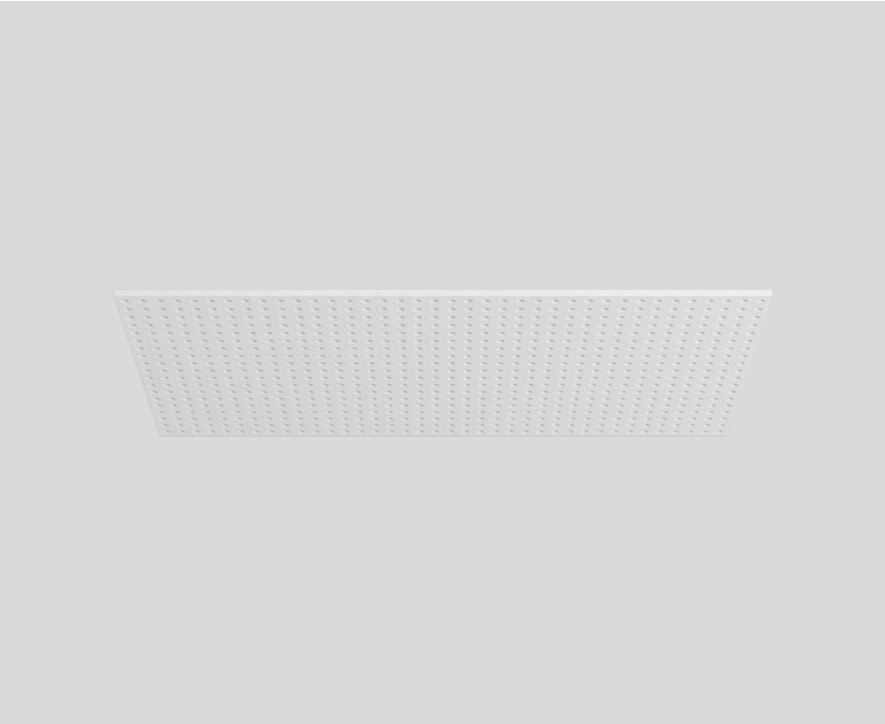

| |
|-----------------------------|
| General |
| Luminaire / Track , Mounted |
| white |

| |
|---|
| Physical |
| panel only for NODE connector + track 1210 mm |
| length 2435 mm |
| width 1235 mm |
| height 25 mm |

| |
|---|
| Acoustics |
| Alpha w (α_w) up to 1 ¹ |
| SAC (sound absorption class) up to A ¹ |
| NRC up to 1.3 ¹ |
| SAA up to 1.32 ¹ |


¹ Alpha w, SAC, NRC, SAA refer to the best result of the entire product family

Installation instructions



Acoustic element made of high quality, self-supporting PET felt with sound absorbing properties, consisting of 60% recycled PET; rectangular design; high quality visual and tactile surface with embossed pattern, white; foreign fiber inclusions possible; absorption of direct sound and sound reflected from the ceiling; this creates high acoustic performance; for installation in the MOVE IT 25 / 45 suspended system composed of node connectors and profiles; subsequent insertion in already installed MOVE IT suspended system possible; installation without tools;

Product drawing



MOVE IT 25 / 45

ACOUSTIC double grid

inlay
050-231321W



Project / Type

Notes

Count / Date

Equivalent sound absorption area (A_{eq})

| 125 HZ | 250 HZ | 500 HZ | 1000 HZ | 2000 HZ | 4000 HZ |
|--------|--------|--------|---------|---------|---------|
| 1.3 | 2.73 | 3.2 | 4.1 | 4.97 | 5.23 |

Sound absorption coefficient (α_p)

