


MOVE IT 25 / 45

ACOUSTIC double grid

inlay
050-231321L



Project / Type	
Notes	
Count / Date	

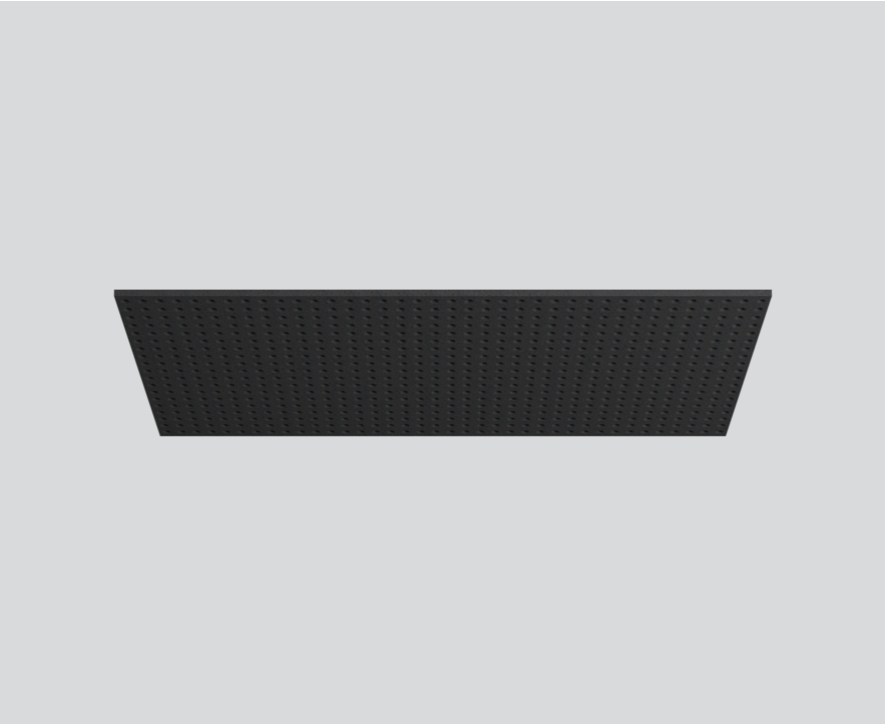

General
Luminaire / Track , Mounted
black

Physical
panel only for NODE connector + track 1210 mm
length 2435 mm
width 1235 mm
height 25 mm
2.2 kg

Acoustics
Alpha w (α_w) up to 1 ¹
SAC (sound absorption class) up to A ¹
NRC up to 1.3 ¹
SAA up to 1.32 ¹


¹ Alpha w, SAC, NRC, SAA refer to the best result of the entire product family

Installation instructions



Acoustic element made of high quality, self-supporting PET felt with sound absorbing properties, consisting of 60% recycled PET; rectangular design; high quality visual and tactile surface with embossed pattern, black; foreign fiber inclusions possible; absorption of direct sound and sound reflected from the ceiling; this creates high acoustic performance; for installation in the MOVE IT 25 / 45 suspended system composed of node connectors and profiles; subsequent insertion in already installed MOVE IT suspended system possible; installation without tools;

Product drawing



MOVE IT 25 / 45

ACOUSTIC double grid

inlay
050-231321L



Project / Type

Notes

Count / Date

Equivalent sound absorption area (A_{eq})

125 HZ	250 HZ	500 HZ	1000 HZ	2000 HZ	4000 HZ
1.3	2.73	3.2	4.1	4.97	5.23

Sound absorption coefficient (α_p)

