

SPIO 20 wallwasher/floor

trimless

048-17304108W 048-1698107 002-90787



Project / Type

Notes

Count / Date



General

Ceiling , Recessed

rotation 360°

white , RAL9016 ¹

traffic white

IP20

399 lm

LED

2700 K

CRI ≥ 90

L95 / 50000 h

initial MacAdam ≤ 3 SDCM

R_g: 104 , R_f: 88 , R_{f(1-15)}: 89

MR 0.5

MDER 0.46

Optical

wallwasher floor

beam angle 52°

PstLM ≤ 1.0 ²

SVM ≤ 0.4 ²

Electrical

non DIM

system 7.9 W

inset 5.9 W

5.6 Vf

1050 mA


PC2 220-240V

system 51 lm/W³


inset 67 lm/W⁴

Round recessed spotlight in aluminium; surface white powder coated; installation without tools in mounting set due to patented ball catch system; for trimless installation in plasterboard ceilings, specially designed trim with grooves for better adhesion of smoothing compound; suitable for ceiling thickness of 9-25 mm; special mounting tool for easy installation of the trimless housing available as an accessory; paintable light inset; shadow joint between light inset and mounting set optionally fillable; passive cooling of the LEDs through improved heat sink geometry; light colour 2700 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 90; min. 95% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; with specially computed, asymmetrical reflector for homogeneous lighting intensity; high quality reflector with micro-faceted, aluminum-vaporised surface; no multiple shadows; uncluttered ceiling look through recessed lighting level; reduced light-emitting surface (only ø 13 mm); degree of protection IP20; PC2 220-240V; incl. converter, non dimmable; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Light distribution



Product drawing

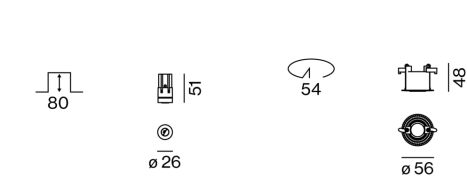

Physical

trimless

diameter 26 mm

height 51 mm

Cutout

diameter 48 mm

min. ceiling thickness 9 mm

max. ceiling thickness 25 mm

recessed depth 80 mm

¹ RAL code ² Value of containing product at full load (undimmed)
³ incl. optical losses and the efficiency of the operating device (converter)
⁴ incl. optical losses

Installation instructions



Lighting calculator

