

MINO 60 mid lumen

suspended


046-42L811GG



Project / Type

Notes

Count / Date

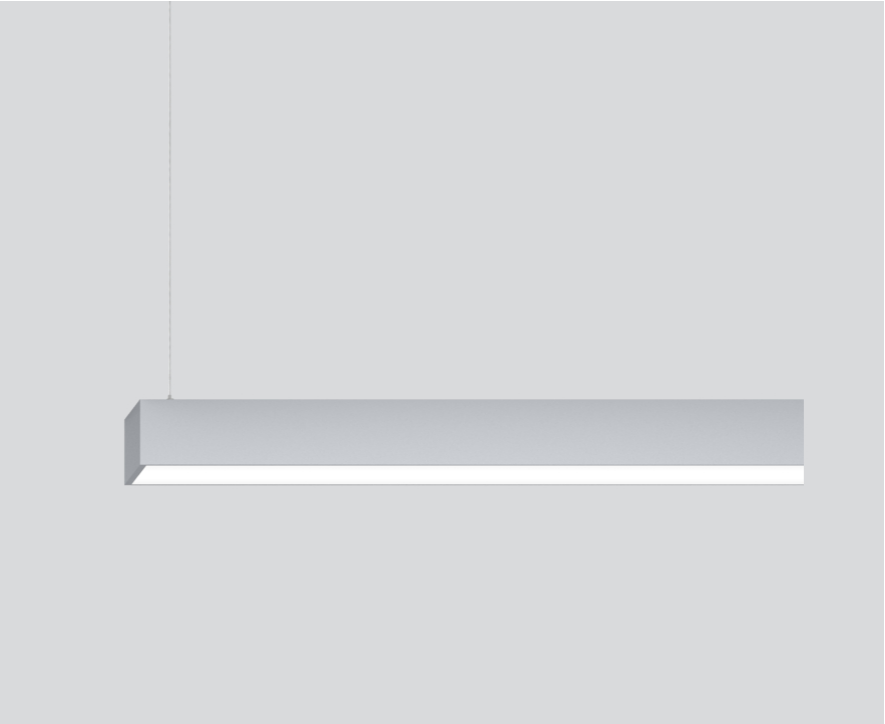

220-240V

X-PERT

UGR
≤ 19

cd/m²
≤ 3000

CRI
≥ 90

X-PERT

General
Ceiling , Suspended
grey , RAL9006 ¹
1140 lm/m
IP20
2670 lm

LED
4000 K
CRI ≥ 90
L90 / 50000 h
photobio. safety RG 0 - no Risk
initial MacAdam ≤ 3 SDCM
R _g : 99 , R _f : 92 , R ₍₁₋₁₅₎ : 90
MR 0.81
MDER 0.74


Optical
Microprismatic
microprismatic
UGR < 19 , ≥65° <3000 cd/m²
PstLM ≤ 1.0 ²

Luminaire housing made of extruded aluminium profile; light tight final end caps made of aluminium; no visible screws; angular design; surface grey powder coated; suspended luminaire with 1500mm cable suspension; with integrated tool-less suspension height adjustment; spring clip attachment to the luminaire; freely positionable; incl. feed (white); lighting profile (end cover pre-assembled) available in advance for installation; remaining lamp components mounted without tools; LED light inset consisting of highly reflective lacquered aluminium for improved thermal management; light colour 4000 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 90; min. 90% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; micro prismatic PMMA diffuser incl. diffuser film for homogeneous illumination and reduced luminance; UGR ≤ 19; VDU compatible workplace luminaire according to DIN EN 12464-1; luminance above 65° ≤ 3000 cd/m²; degree of protection IP20; PC1 220-240V; photobiological safety according to IEC 62471 risk group RG 0 - no Risk; internal wiring in light halogen free; incl. converter, non dimmable; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;


Electrical
non DIM
26.6 W
PC1 220-240V
100 lm/W
11 W/m

Physical
cabl 1500 mm
length 2352 mm
width 60 mm
height 80 mm
6.5 kg

Light distribution



Product drawing



¹ RAL code ² Value of containing product at full load (undimmed)

Installation instructions



Lighting calculator

