


TILA 16 suspended

MOVE IT 10

030-6610634F



Project / Type	
Notes	
Count / Date	

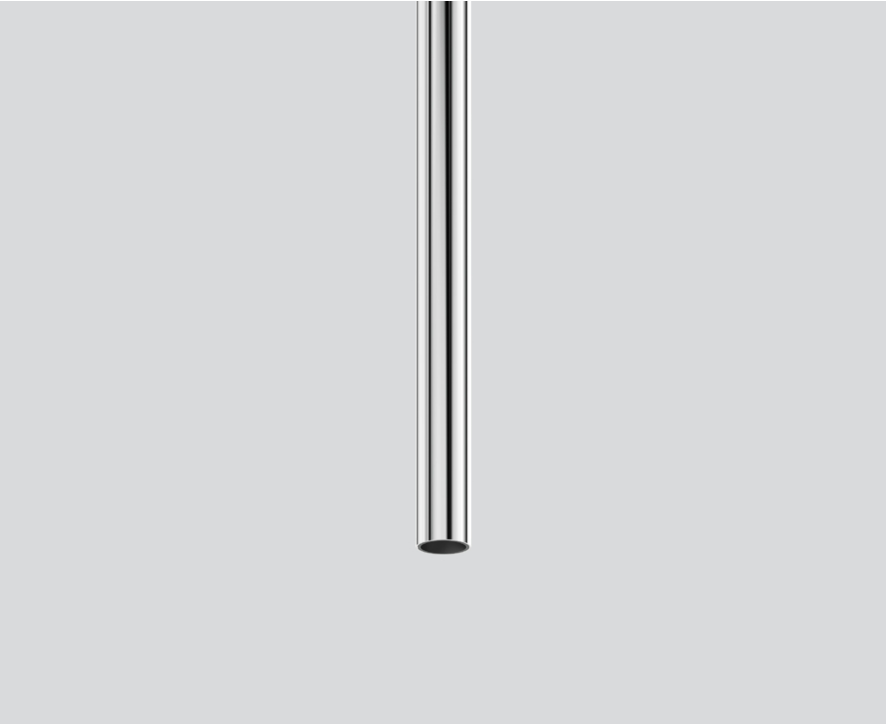

General

Ceiling , Track Suspended
chrome
IP20
220 lm
optical inset 83 lm/W ¹

LED

4000 K
CRI ≥ 90
L85 / 50000 h
initial MacAdam ≤ 3 SDCM
R _g : 94 , R _r : 87 , R _{t(1-15)} : 90
MR 0.86
MDER 0.78

Optical

flood
beam angle 31°
PstLM ≤ 1.0 ²
SVM ≤ 0.4 ²

Electrical


DALI-2
48 V
fixture 3.3 W
fixture 67 lm/W ³
optical inset 2.6 W
PC3
1 DALI Addr.

Physical

diameter 16 mm
height 600 mm
1500 mm


¹ OPTICAL INSET: incl. consideration of optical losses
² Value of containing product at full load (undimmed)
³ FIXTURE: incl. consideration of optical losses & internal control unit losses SYSTEM: incl. consideration of optical losses, internal control unit losses & operating device efficiency.

Light distribution



flood 31°		
h (m)	E0° (lx)	ø (m)
1	731	0.56
2	183	1.12
3	81	1.67
4	46	2.23
5	29	2.79

Product drawing



Installation instructions



Lighting calculator

