

OPAL HIGH PERFORMANCE

MOVE IT 10


030-6120438H



Project / Type _____


Notes _____

Count / Date _____

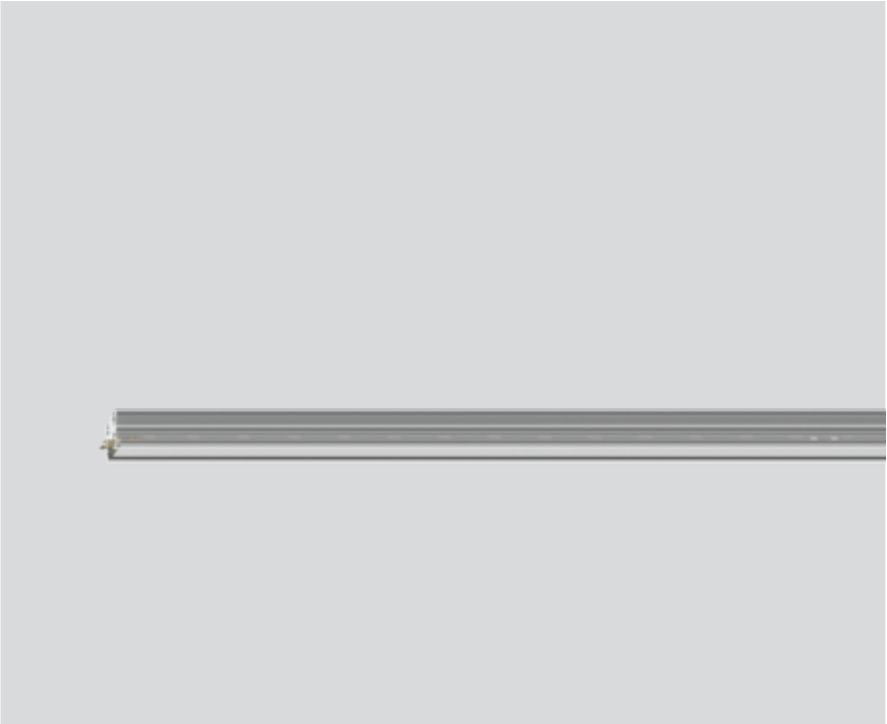


Linear light inset made of PMMA; light inset can be installed and moved without tools by means of clip mount; flush with profile system; power supplied via MOVE IT system track profile; hot plug protection; completely homogeneously illuminated, satin PMMA cover; passive cooling of the LEDs through improved heat sink geometry; light colour 2700 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 90 ; min. 85% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; degree of protection IP20; PC3; 48 V; DALI-2 control; flicker-free visual comfort through analogue current control (minimum value 1%); light source not replaceable;

Light distribution



Product drawing



General

Ceiling / Wall , Track _____

IP20 _____

389 lm _____

optical inset 88 lm/W¹ _____

LED

2700 K _____

CRI ≥ 90 _____

L85 / 50000 h _____

initial MacAdam ≤ 3 SDCM _____

R_g: 100 , R_f: 89 , R₍₁₋₁₅₎: 86 _____

MR 0.49 _____

MDER 0.44 _____

Optical

opal (lamberts) _____

PstLM ≤ 1.0 ² _____

SVM ≤ 0.4 ² _____

Electrical

DALI-2 _____

48 V _____

fixture 5.9 W _____

optical inset 4.4 W _____

PC3 _____

1 DALI Addr. _____

Physical

length 500 mm _____

width 12 mm _____

height 10 mm _____

¹ OPTICAL INSET: incl. consideration of optical losses
² Value of containing product at full load (undimmed)

Installation instructions

