

# VITA indirect module

wall system


099-9911616 099-9326037A



Project / Type


Notes

Count / Date

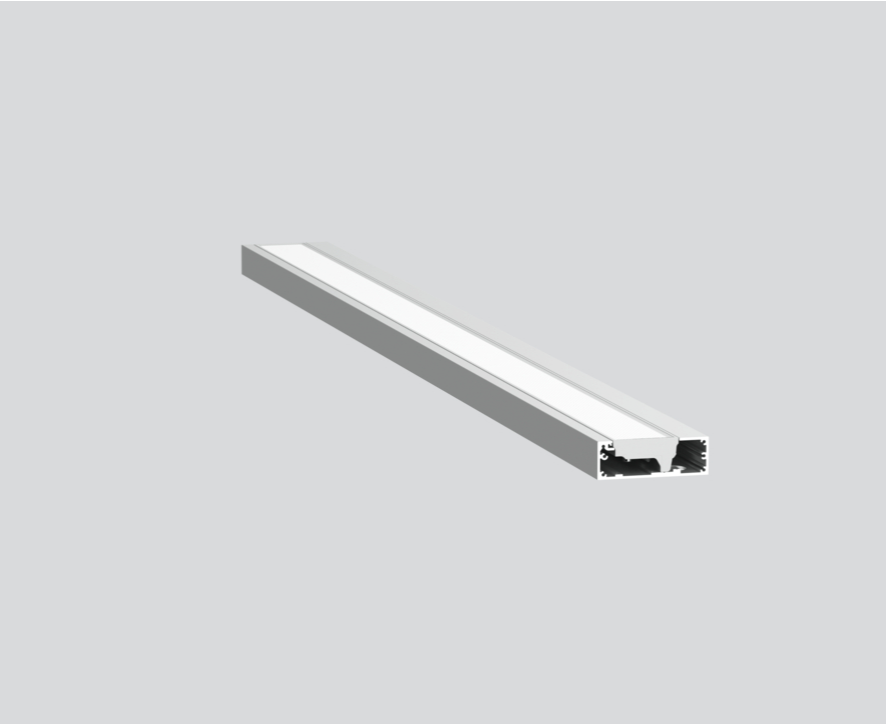


Luminaire housing made of extruded aluminium profile; angular design; no visible screws; for lighting systems; surface anodised aluminium; suitable for wall mounting; equipped with one light inset made of aluminium; surface white powder coated; indirect illumination characteristic; lighting module with specially computed, asymmetrical high gloss reflector, linear prismatic cover incl. foil; light colour 3000 K; binning initial MacAdam  $\leq 3$  SDCM; CRI  $\geq 90$ ; min. 80% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; degree of protection IP20; PC1; 220-240 V; with 2 plug-in terminals for through wiring; incl. DALI-2 converter; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

## Light distribution



## Product drawing



## General

Wall , Surface

anodised aluminium

white

IP20

7160 lm

## LED

3000 K

CRI  $\geq 90$

L80 / 50000 h

initial MacAdam  $\leq 3$  SDCM

R<sub>g</sub>: 99 , R<sub>r</sub>: 91 , R<sub>t(1-15)</sub>: 89

MR 0.61

MDER 0.55

## Optical

Linear Prismatic

asymmetric

PstLM  $\leq 1.0$ <sup>1</sup>

SVM  $\leq 0.4$ <sup>1</sup>

## Electrical

DALI-2

220-240 V

system 65 W

system 110 lm/W<sup>2</sup>

PC1

1 DALI Addr.

## Physical

length 1007 mm

width 75 mm

height 25 mm

1.7 kg

<sup>1</sup> Value of containing product at full load (undimmed)  
<sup>2</sup> incl. consideration of optical losses, internal control unit losses & operating device efficiency

## Installation instructions

