

# SASSO 100 round wallwasher

trimless exposed concrete

048-2740619A 048-2795210 002-90776



Project / Type

Notes

Count / Date



220-240V

CRI

≥ 90

General

Ceiling , Recessed

rotation 360°

gold , RAL260-M <sup>1</sup>

Mounting set white aluminium

IP20

2090 lm

LED

4000 K

CRI ≥ 90

L70 / 50000 h

initial MacAdam ≤ 3 SDCM

R<sub>g</sub>: 94 , R<sub>f</sub>: 87 , R<sub>(f-15)</sub>: 86

MR 0.8

MDER 0.72

Optical

wallwasher

PstLM ≤ 1.0 <sup>2</sup>

SVM ≤ 0.4 <sup>2</sup>

Electrical

DALI-2

29.4 W

inset 25.0 W

36 Vf

350 mA

PC2 220-240V

71 lm/W

inset 84 lm/W

Physical

trimless for exposed concrete ceiling

length 230 mm

width 230 mm

height 162 mm


2.82 kg

Cutout


recessed depth 120 mm

Round recessed spotlight in die-cast aluminium; 1 lamp; surface gold; 360° rotatable; installation without tools in mounting set due to patented ball catch system; concrete housings for exposed concrete ceilings; for trimless installation; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 4000 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 90; min. 70% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; with specially computed, asymmetrical reflector for homogeneous lighting intensity; high quality reflector with micro-faceted, aluminum-vaporised surface; PC2 220-240V; incl. DALI-2 converter; through wiring connection box, 3-pole or 5-pole, available as an accessory; accessories are listed separately; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

## Light distribution



## Product drawing

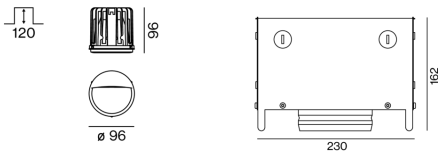

<sup>1</sup> RAL code <sup>2</sup> Value of containing product at full load (undimmed)

## Installation instructions



## Lighting calculator

