

SASSO 100 round wallwasher/floor

trimless exposed concrete

048-2740514W 048-2795210 002-90779



Project / Type _____

Notes _____

Count / Date _____



General

Ceiling , Recessed _____

rotation 360° _____

matt silver _____

Mounting set white aluminium _____

IP20 _____

1990 lm _____

LED

3000 K _____

CRI ≥ 90 _____

L80 / 50000 h _____

initial MacAdam ≤ 2 SDCM _____

R_g: 100 , R_f: 91 , R_{f1-5}: 88 _____

MR 0.59 _____

MDER 0.53 _____

Optical

wallwasher floor _____

PstLM ≤ 1.0 ¹ _____

SVM ≤ 0.4 ¹ _____

Electrical

DALI-2 _____

system 19.2 W _____

inset 16.3 W _____

36 Vf _____

500 mA _____

PC2 220-240V _____

system 104 lm/W² _____

inset 122 lm/W³ _____

Physical

trimless for exposed concrete ceiling _____

length 230 mm _____

width 230 mm _____

height 162 mm _____

2.83 kg _____

Cutout


recessed depth 100 mm _____

¹ Value of containing product at full load (undimmed)


² incl. optical losses and the efficiency of the operating device (converter)

³ incl. optical losses

Light distribution



Product drawing

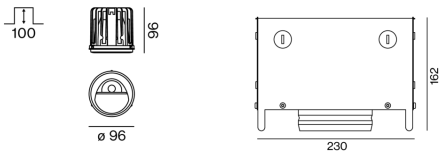

Installation instructions



Lighting calculator

