

# SASSO 100 round wallwasher

trimless exposed concrete

048-2740414A 048-2795210 002-90774



Project / Type

Notes

Count / Date



## General

Ceiling , Recessed  
 rotation 360°  
 matt silver  
 Mounting set white aluminium  
 IP20  
 2050 lm

## LED

2700 K  
 CRI ≥ 90  
 L70 / 50000 h  
 initial MacAdam ≤ 3 SDCM  
 R<sub>g</sub>: 97 , R<sub>f</sub>: 91 , R<sub>(1-15)</sub>: 90  
 MR 0.53  
 MDER 0.48

## Optical

wallwasher  
 PstLM ≤ 1.0<sup>1</sup>  
 SVM ≤ 0.4<sup>1</sup>

## Electrical

non DIM  
 29.4 W  
 inset 25.0 W  
 36 Vf  
 350 mA  
 PC2 220-240V  
 70 lm/W  
 inset 82 lm/W

## Physical

trimless for exposed concrete ceiling  
 length 230 mm  
 width 230 mm  
 height 162 mm  
 2.78 kg


## Cutout

recessed depth 120 mm


<sup>1</sup> Value of containing product at full load (undimmed)

Round recessed spotlight in die-cast aluminium; 1 lamp; surface matt silver; 360° rotatable; installation without tools in mounting set due to patented ball catch system; concrete housings for exposed concrete ceilings; for trimless installation; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 2700 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 90; min. 70% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; with specially computed, asymmetrical reflector for homogeneous lighting intensity; high quality reflector with micro-faceted, aluminum-vaporised surface; PC2 220-240V; incl. converter, non dimmable; through wiring connection box, 3-pole or 5-pole, available as an accessory; accessories are listed separately; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

## Light distribution



## Product drawing

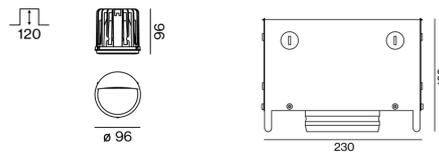

## Installation instructions



## Lighting calculator

