

# MOVE IN 45 flex round

trim

063-8221518V 063-8822118 002-90726



Project / Type

Notes

Count / Date



220-240V

X-PERT

UGR  $\leq 10$

CRI  $\geq 90$

X-PERT

## General

Ceiling , Semi-Recessed

tilt max 90°

rotation 360°

black , RAL9005 <sup>1</sup>

Mounting set jet black

IP20

346 lm

## LED

3000 K

CRI  $\geq 90$

L85 / 50000 h

initial MacAdam  $\leq 3$  SDCM

R<sub>g</sub>: 98 , R<sub>r</sub>: 91 , R<sub>(1-15)</sub>: 89

MR 0.6

MDER 0.55

## Optical

super spot

beam angle 8°

PstLM  $\leq 1.0$  <sup>2</sup>

SVM  $\leq 0.4$  <sup>2</sup>

## Electrical

non DIM

9.2 W

inset 6.9 W

11 Vf

600 mA

PC2 220-240V

38 lm/W

Round spotlight element in aluminium; surface black powder coated; installation without tools in mounting set due to patented ball catch system; recessed light with trim jet black; suitable for ceiling thickness of 2-25 mm; spotlight element height adjustable without tools: flush with the ceiling, or extended 25 mm or 35 mm; 360° rotatable and 90° tiltable; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 3000 K; binning initial MacAdam  $\leq 3$  SDCM; CRI  $\geq 90$ ; min. 85% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; high quality, aluminium, vapour deposition coated reflector with faceted lens design; precise radiation characteristic with 8° beam; good glare control through recessed light point level; optical attachment available as accessory; accessories are listed separately; degree of protection IP20; PC2 220-240V; incl. converter, non dimmable; converter wired secondary side; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;


## Light distribution



super spot 8°

| h (m) | E0° (lx) | ø (m) |
|-------|----------|-------|
| 1     | 12100    | 0.14  |
| 2     | 3000     | 0.28  |
| 3     | 1300     | 0.41  |
| 4     | 800      | 0.55  |
| 5     | 500      | 0.69  |

## Product drawing

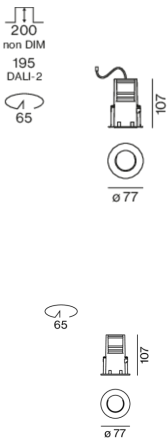

## Physical

trim

diameter 77 mm

height 107 mm

0.62 kg

## Cutout

diameter 65 mm

min. ceiling thickness 2 mm

max. ceiling thickness 25 mm

recessed depth 200 mm

<sup>1</sup> RAL code <sup>2</sup> Value of containing product at full load (undimmed)

## Installation instructions



## Lighting calculator

