

# MOVE IN 45 flex round

trimless

063-8221514S 063-8812117 002-90722



Project / Type \_\_\_\_\_

Notes \_\_\_\_\_

Count / Date \_\_\_\_\_



**General**

Ceiling , Semi-Recessed \_\_\_\_\_

tilt max 90° \_\_\_\_\_

rotation 360° \_\_\_\_\_

chrome \_\_\_\_\_

IP20 \_\_\_\_\_

1100 lm \_\_\_\_\_

fixture 86 lm/W<sup>1</sup> \_\_\_\_\_

**LED**

3000 K \_\_\_\_\_

CRI ≥ 90 \_\_\_\_\_

L80 / 50000 h \_\_\_\_\_

initial MacAdam ≤ 2 SDCM \_\_\_\_\_

R<sub>g</sub>: 100 , R<sub>f</sub>: 91 , R<sub>f(1-15)</sub>: 88 \_\_\_\_\_

MR 0.59 \_\_\_\_\_

MDER 0.53 \_\_\_\_\_

**Optical**

spot \_\_\_\_\_

beam angle 12° \_\_\_\_\_

P<sub>stLM</sub> ≤ 1.0 <sup>2</sup> \_\_\_\_\_

SVM ≤ 0.4 <sup>2</sup> \_\_\_\_\_

**Electrical**

non DIM \_\_\_\_\_

220-240 V \_\_\_\_\_

system 15.0 W \_\_\_\_\_

fixture 12.8 W \_\_\_\_\_

37 Vf \_\_\_\_\_

350 mA \_\_\_\_\_

PC2 \_\_\_\_\_

**Physical**

trimless \_\_\_\_\_

diameter 75 mm \_\_\_\_\_

height 106 mm \_\_\_\_\_

0.6 kg \_\_\_\_\_

**Cutout**


diameter 65 mm \_\_\_\_\_

min. ceiling thickness 9 mm \_\_\_\_\_

max. ceiling thickness 25 mm \_\_\_\_\_

recessed depth 200 mm \_\_\_\_\_


## Light distribution



spot 12°

h (m)	E0° (lx)	ø (m)
1	13900	0.21
2	3500	0.42
3	1500	0.63
4	900	0.84
5	600	1.06

## Product drawing

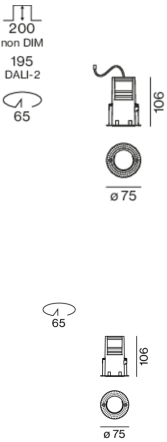

<sup>1</sup> incl. consideration of optical losses & internal control unit losses

<sup>2</sup> Value of containing product at full load (undimmed)

