

# MOVE IN 45 flex round

trimless

063-8221416V 063-8812117 002-90726



Project / Type

Notes

Count / Date



## General

Ceiling , Semi-Recessed

tilt max 90°

rotation 360°

brushed aluminium

IP20

400 lm

## LED

2700 K

CRI ≥ 90

L85 / 50000 h

initial MacAdam ≤ 3 SDCM

R<sub>g</sub>: 99 , R<sub>f</sub>: 91 , R<sub>(1-15)</sub>: 89

MR 0.54

MDER 0.49

## Optical

super spot

beam angle 8°

PstLM ≤ 1.0 <sup>1</sup>

SVM ≤ 0.4 <sup>1</sup>

## Electrical

non DIM

system 9.2 W

inset 6.9 W

11 Vf

600 mA

PC2 220-240V

system 43 lm/W<sup>2</sup>

inset 58 lm/W<sup>3</sup>

## Physical

trimless

diameter 75 mm

height 106 mm

0.58 kg

## Cutout

diameter 65 mm

min. ceiling thickness 9 mm

max. ceiling thickness 25 mm

recessed depth 200 mm

<sup>1</sup> Value of containing product at full load (undimmed)

<sup>2</sup> incl. optical losses and the efficiency of the operating device (converter)

<sup>3</sup> incl. optical losses


## Light distribution



super spot 8°

h (m)	E0° (lx)	ø (m)
1	14000	0.14
2	3500	0.28
3	1600	0.41
4	900	0.55
5	600	0.69

## Product drawing

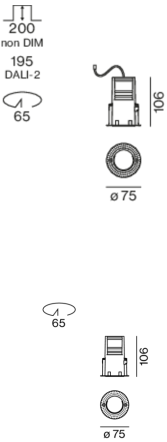

## Installation instructions



## Lighting calculator

