

# MOVE IN 32 flex round

trimless

063-8211414S 063-8811117 002-90742



Project / Type \_\_\_\_\_

Notes \_\_\_\_\_

Count / Date \_\_\_\_\_



**General**

Ceiling , Semi-Recessed \_\_\_\_\_

tilt max 90° \_\_\_\_\_

rotation 360° \_\_\_\_\_

chrome \_\_\_\_\_

IP20 \_\_\_\_\_

754 lm \_\_\_\_\_

fixture 86 lm/W<sup>1</sup> \_\_\_\_\_

**LED**

2700 K \_\_\_\_\_

CRI ≥ 90 \_\_\_\_\_

L80 / 50000 h \_\_\_\_\_

initial MacAdam ≤ 2 SDCM \_\_\_\_\_

R<sub>g</sub>: 99 , R<sub>r</sub>: 91 , R<sub>t(1-15)</sub>: 89 \_\_\_\_\_

MR 0.53 \_\_\_\_\_

MDER 0.48 \_\_\_\_\_

**Optical**

spot \_\_\_\_\_

beam angle 18° \_\_\_\_\_

P<sub>stLM</sub> ≤ 1.0 <sup>2</sup> \_\_\_\_\_

SVM ≤ 0.4 <sup>2</sup> \_\_\_\_\_

**Electrical**

non DIM \_\_\_\_\_

220-240 V \_\_\_\_\_

system 11.6 W \_\_\_\_\_

fixture 8.7 W \_\_\_\_\_

36 Vf \_\_\_\_\_

250 mA \_\_\_\_\_

PC2 \_\_\_\_\_

**Physical**

trimless \_\_\_\_\_

diameter 63 mm \_\_\_\_\_

height 92 mm \_\_\_\_\_

0.31 kg \_\_\_\_\_

**Cutout**

diameter 54 mm \_\_\_\_\_

min. ceiling thickness 9 mm \_\_\_\_\_


max. ceiling thickness 25 mm \_\_\_\_\_

recessed depth 110 mm \_\_\_\_\_

<sup>1</sup> FIXTURE: incl. consideration of optical losses & internal control unit losses SYSTEM: incl. consideration of optical losses, internal control unit losses & operating device efficiency.


<sup>2</sup> Value of containing product at full load (undimmed)

## Light distribution



spot 18°		
h (m)	E0° (lx)	ø (m)
1	5710	0.32
2	1430	0.63
3	630	0.95
4	360	1.27
5	230	1.58

## Product drawing

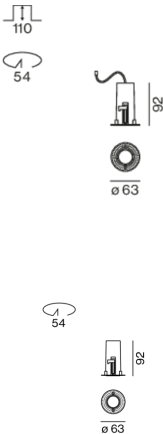

## Installation instructions



## Lighting calculator

