

# MOVE IN 45 round

trimless

063-8121414S 063-8812117 002-90722



Project / Type

Notes

Count / Date



## General

Ceiling , Semi-Recessed

chrome

IP20

1040 lm

fixture 81 lm/W<sup>1</sup>

## LED

2700 K

CRI ≥ 90

L80 / 50000 h

initial MacAdam ≤ 2 SDCM

R<sub>g</sub>: 99 , R<sub>r</sub>: 91 , R<sub>(1-15)</sub>: 89

MR 0.53

MDER 0.48

## Optical

spot

beam angle 12°

PstLM ≤ 1.0 <sup>2</sup>

SVM ≤ 0.4 <sup>2</sup>

## Electrical

non DIM

220-240 V

system 15.0 W

fixture 12.7 W

37 Vf

350 mA

PC2

## Physical

trimless

diameter 75 mm

height 106 mm

0.59 kg

## Cutout

diameter 65 mm

min. ceiling thickness 9 mm


max. ceiling thickness 25 mm

recessed depth 200 mm

<sup>1</sup> incl. consideration of optical losses & internal control unit losses

<sup>2</sup> Value of containing product at full load (undimmed)


## Light distribution



spot 12°

h (m)	E0° (lx)	ø (m)
1	13200	0.21
2	3300	0.42
3	1500	0.63
4	800	0.84
5	500	1.06

## Product drawing

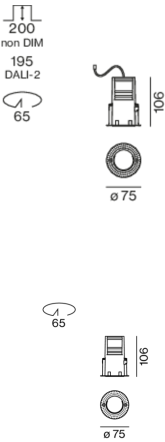

## Installation instructions



## Lighting calculator

