




Project / Type
Notes
Count / Date

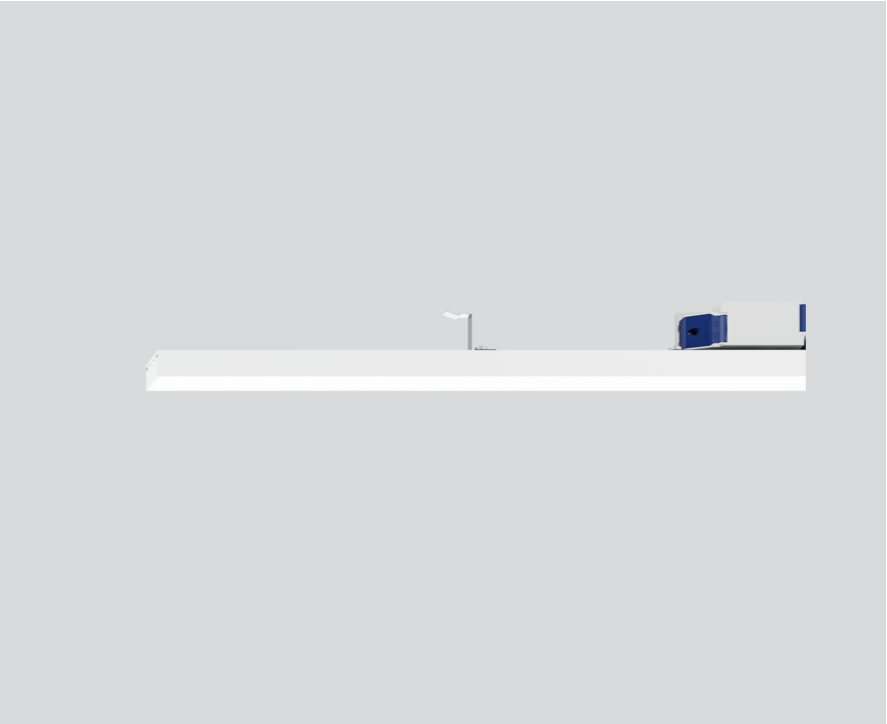

RG0 IEC 62471	220-240V	X-PERT	X-PERT
------------------	----------	--------	--------

General

Ceiling , Recessed
white , RAL 9016 ¹
2300 lm/m
IP20
1730 lm

LED

4000 K
CRI ≥ 90
L90 / 50000 h
photobio. safety RG 0 - no Risk
initial MacAdam ≤ 3 SDCM
R _g : 99 , R _f : 92 , R ₍₁₋₁₅₎ : 90
MR 0.81
MDER 0.74

Optical

Microprismatic
microprismatic
PstLM ≤ 1.0 ²
SVM ≤ 0.4 ²

Luminaire housing made of extruded aluminium profile; angular design; for continuous lighting systems; light-tight end caps in aluminium (available as an accessory); surface white powder coated; suitable for installation in the HAUFÉ louvre ceiling system; extruded profile for improved thermal management; light colour 4000 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 90; min. 90% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; microprismatic PMMA cover; degree of protection IP20; PC2 220-240V; photobiological safety according to IEC 62471 risk group RG 0 - no Risk; incl. DALI-2 converter; converter flexible positionable on the luminaire profile; converter suitable for through-wiring; accessories are listed separately; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Electrical


DALI-2
16.9 W
PC2 220-240V
102 lm/W
23 W/m

Physical

length 750 mm
width 38 mm
height 77 mm
5.5 kg

¹ RAL code ² Value of containing product at full load (undimmed)

Light distribution



Product drawing



Installation instructions



Lighting calculator

