




Project / Type

Notes

Count / Date

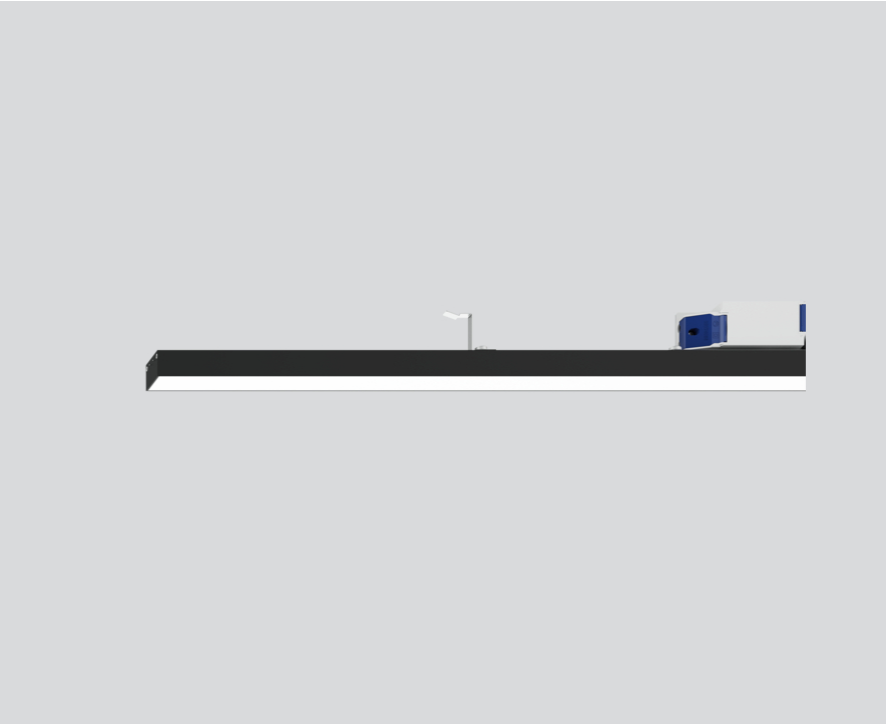

RG0

IEC 62471

220-240V

X-PERT

X-PERT

General

Ceiling , Recessed

black , RAL 9005 ¹

2450 lm/m

IP20

1840 lm

LED

4000 K

CRI ≥ 90

L90 / 50000 h

photobio. safety RG 0 - no Risk

initial MacAdam ≤ 3 SDCM

R_g: 99 , R_f: 92 , R₍₁₋₁₅₎: 90

MR 0.81

MDER 0.74

Optical

High Performance Opal

opal (lambertsch)

PstLM ≤ 1.0 ²

SVM ≤ 0.4 ²

Electrical

DALI-2

16.9 W

PC2 220-240V

109 lm/W

23 W/m

Physical

length 750 mm


width 38 mm

height 77 mm

5.5 kg

¹ RAL code ² Value of containing product at full load (undimmed)

Light distribution



Product drawing



Installation instructions

Lighting calculator

