


# SQUADRO double-sided wallwasher

trim

049-2020018B




Project / Type
Notes
Count / Date


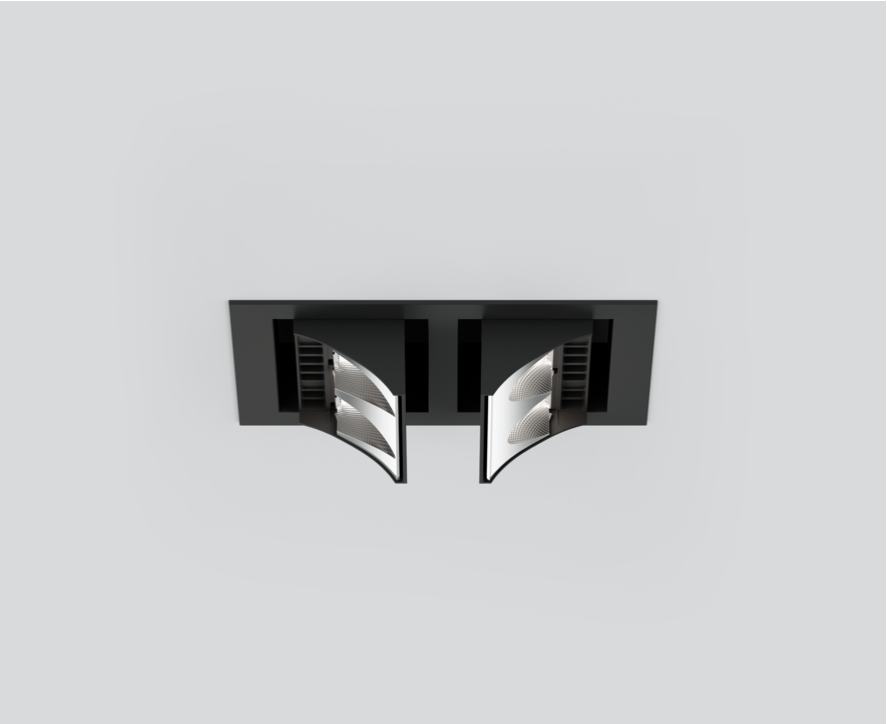


Recessed ceiling spotlight in die cast aluminium with 2x2-lamp design; surface black powder coated; with wrap around edge; suitable for ceiling thickness of 2-25 mm; installation without tools using snap spring closure; heat sink integrated into luminaire geometry for optimum thermal management and passive cooling of LEDs; with COB (Chip on Board) technology for maximum efficiency; light colour 3000 K; binning initial MacAdam  $\leq 2$  SDCM; CRI  $\geq 90$ ; min. 80% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; Aisle spotlight 1x shelf / 1x wall floor washer with special, multi-free-form, facet effect surface reflectors for high precision light control; precise shelf and aisle zone lighting, optimum longitudinal glare control for high viewing comfort in the aisle zone; adjustable light modules (tiltable  $+20^\circ$  to  $-10^\circ$ ); degree of protection IP20; IP 40 protection glass available as an accessory; accessories are listed separately; PC2 220-240V; incl. converter, non dimmable; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

## Light distribution

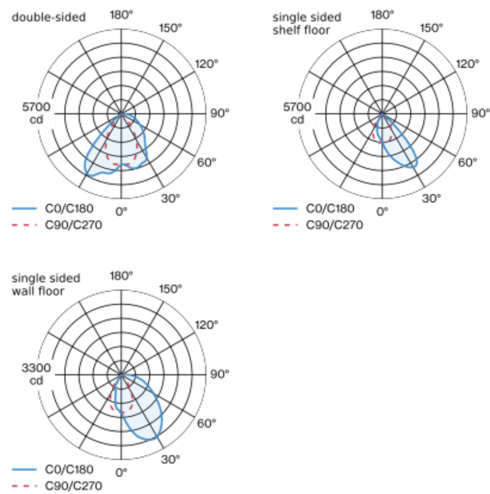

## Product drawing



## General

Ceiling , Recessed
tilt min $-10^\circ$
tilt max $20^\circ$
black , RAL9005 <sup>1</sup>
IP20
4820 <sup>2</sup> , 4830 <sup>3</sup> , 9650 <sup>4</sup> lm

## LED

3000 K
CRI $\geq 90$
L80 / 50000 h
initial MacAdam $\leq 2$ SDCM
R <sub>g</sub> : 98 , R <sub>f</sub> : 91 , R <sub>(1-15)</sub> : 93
MR 0.54
MDER 0.49

## Optical

shelf / wall floor washer
PstLM $\leq 1.0$ <sup>5</sup>
SVM $\leq 0.4$ <sup>5</sup>

## Electrical

non DIM
system 36 <sup>2</sup> , 36 <sup>3</sup> , 71 <sup>4</sup> W
PC2 220-240V
system 134 <sup>2</sup> , 134 <sup>3</sup> , 136 <sup>4</sup> lm/W <sup>6</sup>

## Physical

length 180 mm
width 209 mm
height 76 mm

## Cutout

length 145 mm
width 190 mm
min. ceiling thickness 2 mm
max. ceiling thickness 25 mm
recessed depth 85 mm

<sup>1</sup> RAL code <sup>2</sup> single sided shelf floor <sup>3</sup> single sided wall floor  
<sup>4</sup> double-sided  
<sup>5</sup> Value of containing product at full load (undimmed)  
<sup>6</sup> incl. optical losses and the efficiency of the operating device (converter)

## Installation instructions



# SQUADRO double-sided wallwasher

trim

049-2020018B



Project / Type

Notes

Count / Date

## Maintenance Factors

Operating Time [h]	10 000	20 000	30 000	40 000	50 000
LLMF	0.977	0.94	0.905	0.871	0.838
LSF	1	1	1	1	1
MF	LMF × RSMF × LLMF × LSF		RSMF <sup>a</sup>	Room Surface Maintenance Factor	
MF	Maintenance Factor		LLMF	Lamp Lumens Maintenance Factor	
LMF <sup>a</sup>	Luminaire Maintenance Factor		LSF	Lamp Survival Faktor	

<sup>a</sup> According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.

## Circuit Breaker Types

Automatic Circuit Breaker Type	Number of Fixtures
B10	8
B13	10
B16	13
B20	16
C10	13
C13	17
C16	22
C20	28

## Optical accessories

### IP40 PROTECTION GLASS

TYPE	ARTICLE NUMBER(S)
2 x 2 lamps / double-sided	049-2920010

