


SQUADRO double-sided wallwasher

trim

049-2020118B




Project / Type
Notes
Count / Date

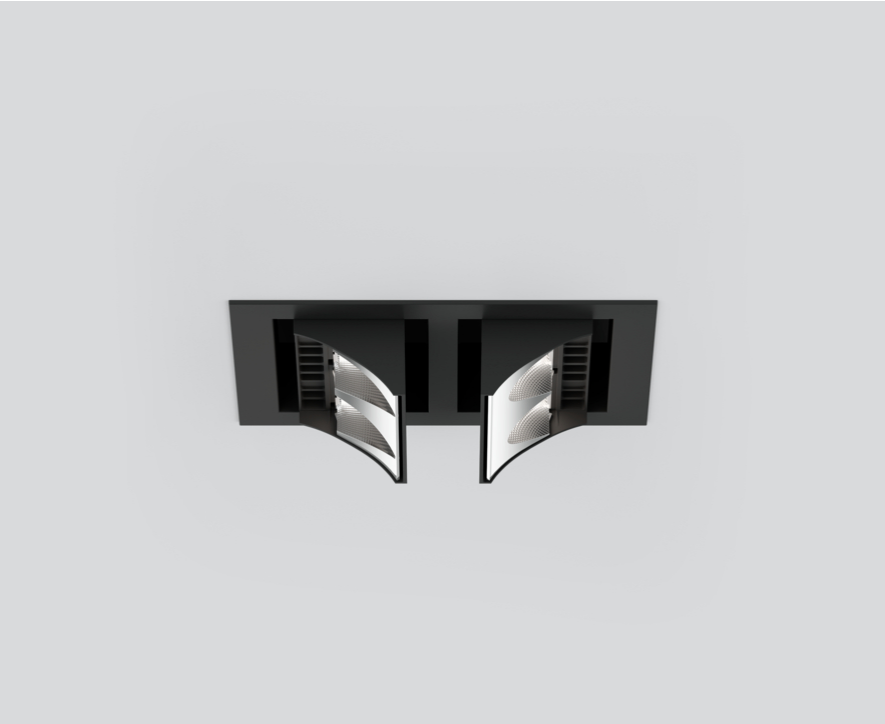


Recessed ceiling spotlight in die cast aluminium with 2x2-lamp design; surface black powder coated; with wrap around edge; suitable for ceiling thickness of 2-25 mm; installation without tools using snap spring closure; heat sink integrated into luminaire geometry for optimum thermal management and passive cooling of LEDs; with COB (Chip on Board) technology for maximum efficiency; light colour 4000 K; binning initial MacAdam ≤ 2 SDCM; CRI ≥ 90 ; min. 80% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; Aisle spotlight 1x shelf / 1x wall floor washer with special, multi-free-form, facet effect surface reflectors for high precision light control; precise shelf and aisle zone lighting, optimum longitudinal glare control for high viewing comfort in the aisle zone; adjustable light modules (tiltable $+20^\circ$ to -10°); degree of protection IP20; IP 40 protection glass available as an accessory; accessories are listed separately; PC2 220-240V; incl. converter, non dimmable; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Light distribution

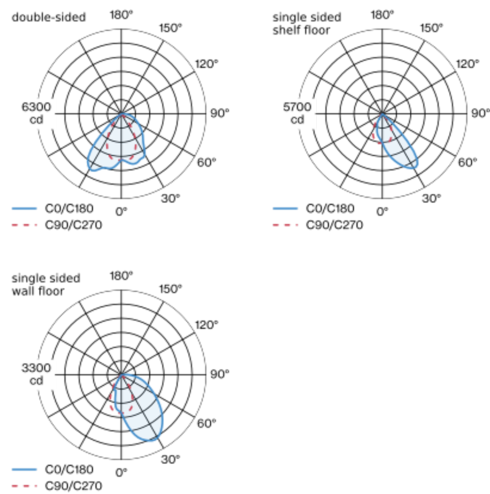

Product drawing



General

Ceiling , Recessed
tilt min -10°
tilt max 20°
black , RAL9005 ¹
IP20
4890 ² , 4900 ³ , 9790 ⁴ lm

LED

4000 K
CRI ≥ 90
L80 / 50000 h
initial MacAdam ≤ 2 SDCM
R _g : 100 , R _f : 92 , R _{f(1-5)} : 91
MR 0.78
MDER 0.71

Optical

shelf / wall floor washer
PstLM ≤ 1.0 ⁵
SVM ≤ 0.4 ⁵

Electrical

non DIM
system 36 ² , 36 ³ , 71 ⁴ W
PC2 220-240V
system 136 ² , 136 ³ , 138 ⁴ lm/W ⁶

Physical

length 180 mm
width 209 mm
height 76 mm

Cutout

length 145 mm
width 190 mm
min. ceiling thickness 2 mm
max. ceiling thickness 25 mm
recessed depth 85 mm

¹ RAL code ² single sided shelf floor ³ single sided wall floor
⁴ double-sided
⁵ Value of containing product at full load (undimmed)
⁶ incl. optical losses and the efficiency of the operating device (converter)

Installation instructions

