

SQUADRO double-sided wallwasher

track
149-2220017B



Project / Type

Notes

Count / Date



General
Ceiling , Track
tilt min -10°
tilt max 20°
rotation 350°
white , RAL 9016 ¹
IP20
4910 ² , 4920 ³ , 9830 ⁴ lm

LED
3000 K
CRI ≥ 90
L80 / 50000 h
initial MacAdam ≤ 2 SDCM
R _g : 98 , R _r : 91 , R _{t(1-15)} : 93
MR 0.54
MDER 0.49


Optical
shelf / wall floor washer
PstLM ≤ 1.0 ^{4 3 2 5}
SVM ≤ 0.4 ^{4 3 2 5}

Tracked spotlight in die cast aluminium with 2x2-lamp design; surface white powder coated; converter integrated into spotlight head; heat sink integrated into luminaire geometry for optimum thermal management and passive cooling of LEDs; with COB (Chip on Board) technology for maximum efficiency; light colour 3000 K; binning initial MacAdam ≤ 2 SDCM; CRI ≥ 90; min. 80% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; Aisle spotlight 1x shelf / 1x wall floor washer with special, multi-free-form, facet effect surface reflectors for high precision light control; precise shelf and aisle zone lighting, optimum longitudinal glare control for high viewing comfort in the aisle zone; adjustable light modules (tiltable +20° to -10°); 350° rotatable; degree of protection IP20; IP 40 protection glass available as an accessory; accessories are listed separately; PC2; 220-240 V; incl. converter, non dimmable; adapter for toolless insertion or movement on a variety of 3-phase power tracks; including attachment for linear alignment of the spotlights; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;


Electrical
non DIM
220-240 V
system 36 ² , 36 ³ , 72 ⁴ W
system 136 ³ -137 ⁴ lm/W ⁶
PC2

Physical
length 140 mm
width 150 mm
height 76 mm

Light distribution

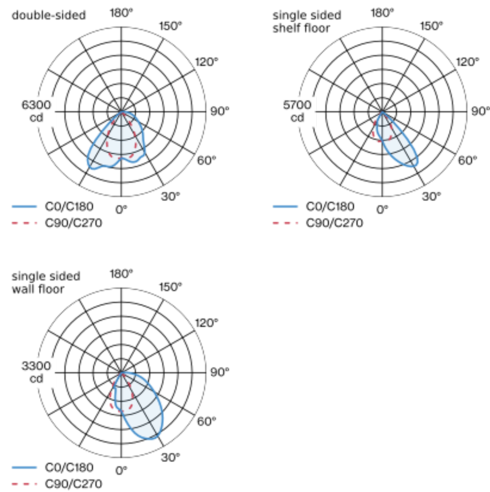

Product drawing



¹ RAL code ² single sided shelf floor ³ single sided wall floor
⁴ double-sided
⁵ Value of containing product at full load (undimmed)
⁶ FIXTURE: incl. consideration of optical losses & internal control unit losses SYSTEM: incl. consideration of optical losses, internal control unit losses & operating device efficiency.

Installation instructions



SQUADRO double-sided wallwasher

track
149-2220017B



Project / Type

Notes

Count / Date

Maintenance Factors

Operating Time [h]	10 000	20 000	30 000	40 000	50 000
LLMF	0.977	0.94	0.905	0.871	0.838
LSF	1	1	1	1	1

MF

MF

LMF^a

LMF × RSMF × LLMF × LSF

Maintenance Factor

Luminaire Maintenance Factor

RSMF^a

LLMF

LSF

Room Surface Maintenance Factor

Lamp Lumens Maintenance Factor

Lamp Survival Faktor

^a According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.

Circuit Breaker Types

Automatic Circuit Breaker Type	Number of Fixtures
B10	33
B13	43
B16	53
B20	67
C10	53
C13	69
C16	85
C20	107

Optical accessories

IP40 PROTECTION GLASS

TYPE	ARTICLE NUMBER(S)
2 x 2 lamps / double-sided	049-2920010

